


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

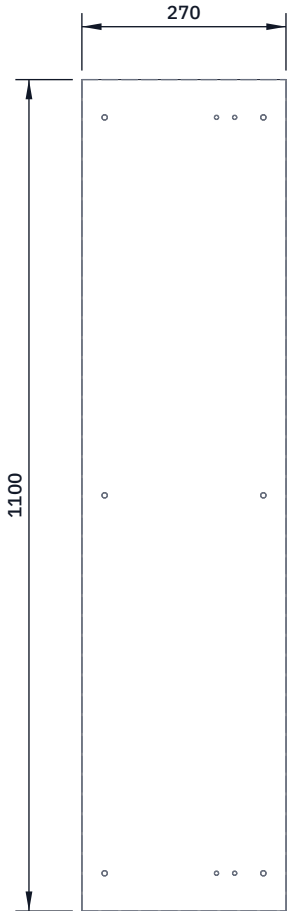


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

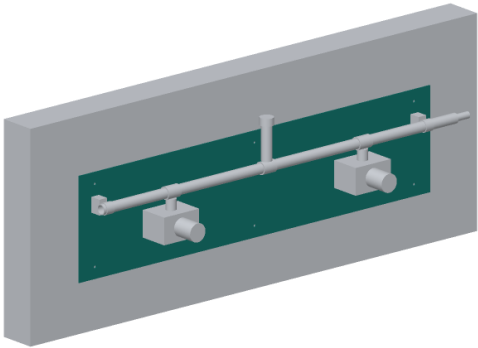

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 1,100 x 270 mm from 3 mm sheet; round the corners; deburr.

Wall holes: six 7 mm holes, 105 mm above and below the middle, at the middle and 500 mm each side of it.

Pipe clip holes: two pairs of 5.5 mm holes, 500 mm each side of the middle, 55 mm above the middle, 24 mm apart up and down.

Fit: the board goes on the gable wall below the enclosure, its middle 465 mm above the ground and below the enclosure's centre;

six screws into wall plugs. The manifold's centre is 45 mm off it, in two stand-off pipe clips; the valves hang from its tees, 5 mm clear.

Check: the board is level and flat on the wall.

EmberGuard valve board: making sketch

DRAWING NO. EGD-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 3 mm, 5052 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand