



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:5; looking down (along -Z)

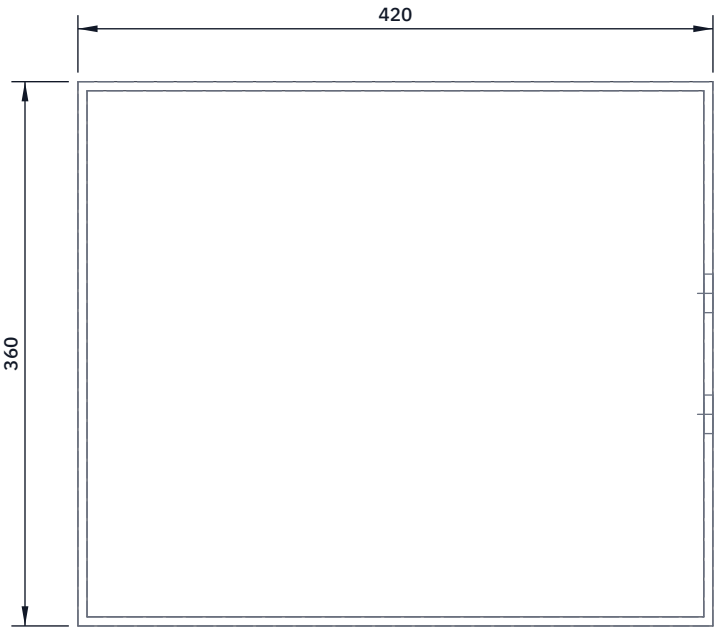

FRONT VIEW
Scale 1:5; looking at the front (along +Y)

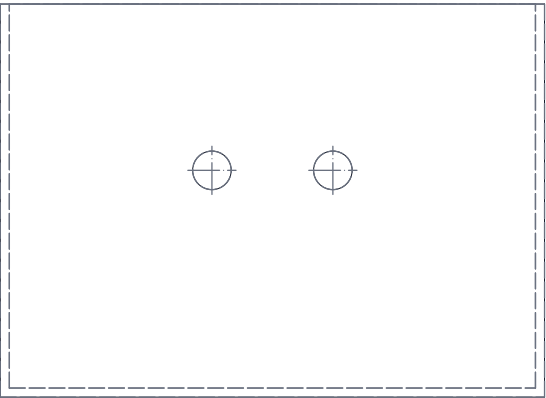

RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

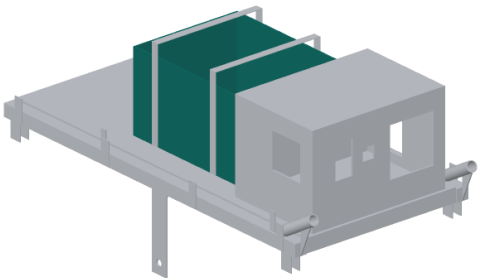

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Only the end facing the electronics box is drilled.

Two 25.5 mm holes for M25 glands, 40 mm each side of the centre line, 150 mm up from the outside bottom: they line up with the gland holes in the electronics box, 60 mm away.

Tape, pilot 3 mm, open with a step drill; deburr; no solvents.

Keep the case's own pressure vent; do not block it.

Inside: the pack sits in the middle of the floor on a 3 mm rubber mat with foam blocks round it; the class T fuse holder is screwed to the floor beside the pack at the gland end, so the positive lead from the pack to the fuse is under 150 mm.

Two cam straps hold the case and lid down through the deck.

Check: glands seat flat; lid closes on its seal with the cables in.

FIELDCELL			github.com/BoujeeEnjinia1701/fieldcell		
FieldCell battery case: drilling sketch					
DRAWING NO. FCL-DWG-111		REV P1	SHEET 1 of 1		SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Bought IP65 polypropylene case about 420 x 360 x 300 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		