


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

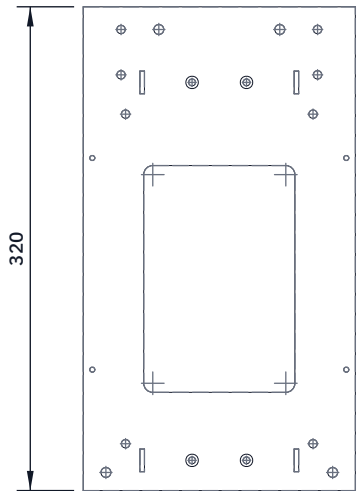

FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 180 x 320 mm, 3 mm aluminium. Front view is the face the box sits on.

Heights from the bottom edge; sideways from the centre line.

Window 100 x 150 mm, 6 mm corner radius, 65 to 215 mm up: drill the corners 12 mm, cut between with a jigsaw, file straight.

Band slots 3 x 15 mm at 51 mm each side, centred 20 and 270 mm up: chain drill 3 mm, file square. The band goes through these.

V-block screws 4.5 mm at 18 mm each side, 20 and 270 mm up; countersink from the front so the screw heads sit flush.

Lug screws 5.5 mm at 62 mm each side, 31 and 249 mm up.

Plate clip screws 5.5 mm at 65 mm each side, 275 and 305 mm up.

Shield screws: drill 3.3 mm and tap M4 at 84 mm each side, 80 and 220 mm up.

Wall holes 6.5 mm at 40 mm each side 305 mm up, 75 mm each side 12 mm up.

Deburr every hole and edge; round the corners to about 2 mm.

Check: lay the V-blocks, lugs and clips on it and look through each hole.

FIELDNODE

github.com/BoujeeEnjinia1701/fieldnode

FieldNode back plate: making sketch

DRAWING NO. FND-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 3 mm, 5052 or 6061 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	