




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

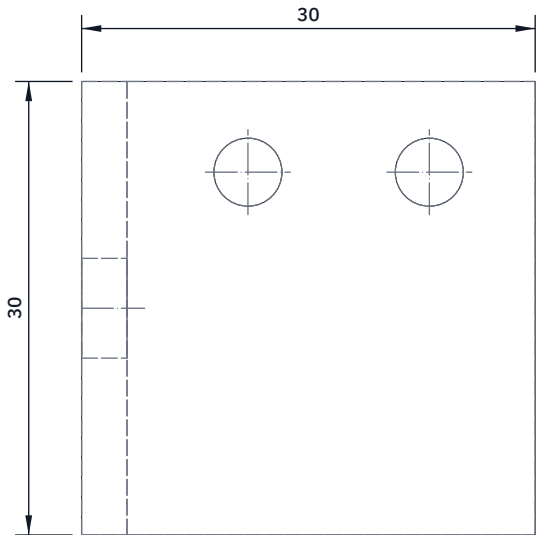


TOP VIEW
Scale 2:1; looking down (along -Z)

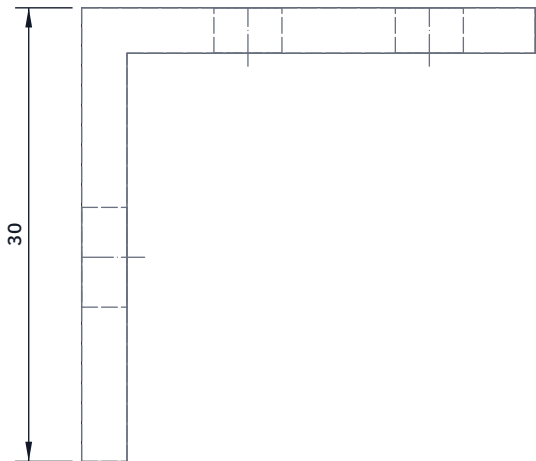

FRONT VIEW
Scale 2:1; looking at the front (along +Y)

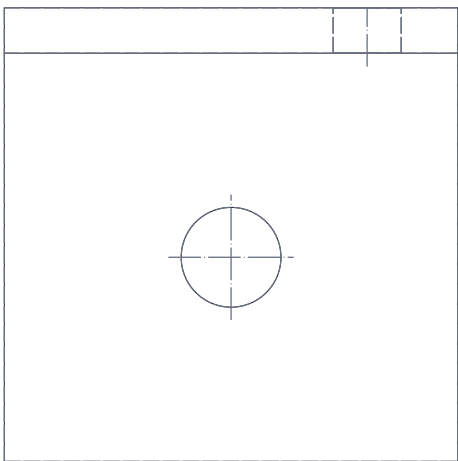

RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

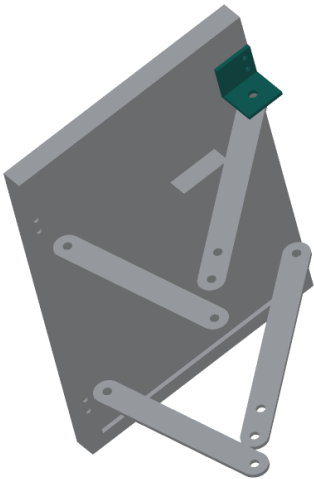

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut four 30 mm lengths of 30 x 30 x 3 angle; deburr.

Flat leg (goes on the panel frame's back lip): two 4.5 mm holes, 6 mm from one end, 11 and 23 mm from the back of the upright leg.

Upright leg: one 6.6 mm hole at mid-length (15 mm), 16.5 mm out from the face that sits on the lip.

All four clips are the same. On each side one goes at the panel's high edge (post), one at its low edge (strut); the drilled end lines up with the panel edge, the flat leg points outward.

Fit: M4 bolts through the clip and the frame lip, nut inside the frame.

Drill the lip through the clip; keep clear of the glass and cells.

Check the panel you buy has a back lip at least 12 mm wide; if not, stop and see open question 3 in the plan.

FIELDNODE		github.com/BoujeeEnjinia1701/fieldnode	
FieldNode panel clip (make 4): making sketch			
DRAWING NO. FND-DWG-106		REV P1	SHEET 1 of 1
		SIZE ANSI B	
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-09-30
DRAWN Amish Chadha			
MATERIAL / NOTES Aluminium equal angle 30 x 30 x 3 mm			
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com		Generated from cad/src; do not edit by hand	