



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

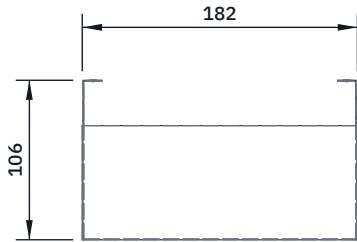


TOP VIEW

Scale 1:5; looking down (along -Z)

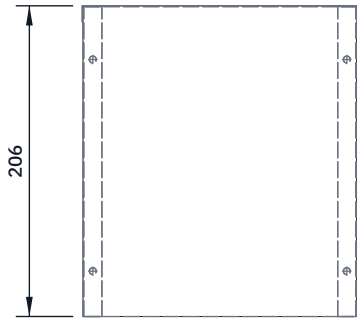


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

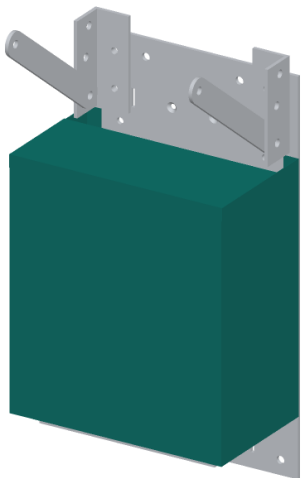

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One blank, folded: front 181 x 206 mm in the middle; a side 106 mm wide on each long edge; a top 76 mm deep on the top edge (the 30 mm vent slot at the back is simply the top being short); 10 mm tabs on the ends of the top; a 12 mm flange on the back of each side. Cut with snips; drill 3 mm relief holes where bend lines cross. Fold the sides back 90 degrees, then the top, then the tabs down over the sides; rivet each tab with two 3.2 mm rivets. Fold each flange 90 degrees inward; drill two 4.5 mm holes 6 mm from the fold, 30 and 170 mm up from the lower edge. Fit: flanges flat on the plate, 3 mm beside the box; four M4 thumb screws into the plate. 15 mm air gap on the front, sides and top. To open the lid: undo the four thumb screws, pull the shield forward. Check: the gap is 15 mm (plus or minus 2) all round.

FIELDNODE

github.com/BoujeeEnjinia1701/fieldnode

FieldNode sun shield (hot sites only): making sketch

DRAWING NO. FND-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES White powder-coated aluminium sheet 0.5 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand