



| REV | DESCRIPTION                                | DATE       | BY |
|-----|--------------------------------------------|------------|----|
| P1  | Making sketch for the prototype build plan | 2026-10-01 | AC |

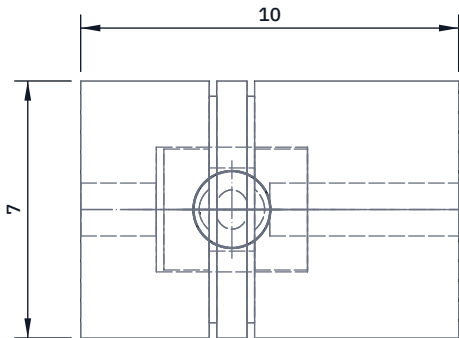


TOP VIEW

Scale 5:1; looking down (along -Z)

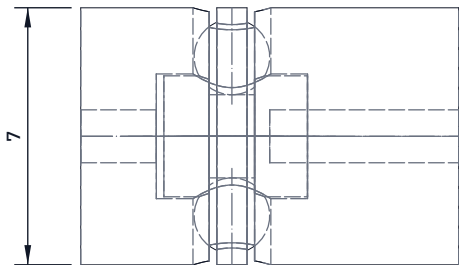


FRONT VIEW

Scale 5:1; looking at the front (along +Y)



RIGHT VIEW

Scale 5:1; looking at the right side (along -X)

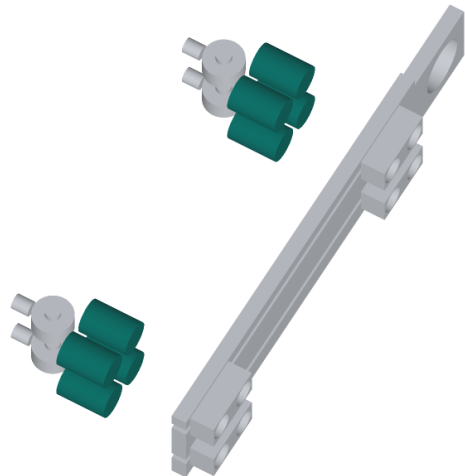

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make eight. Each is 6.8 mm across and 10 mm long when joined.

Socket (pulley side), 6 mm long: a 3.3 mm bore 4 mm deep from the front, a 1.4 mm hole through the back for the pulley line, two 2.05 mm holes across it 4 mm from the back, and a groove 3 mm deep round the outside over those holes.

Plug (tendon side): a 6.8 mm head 4 mm long with a 1.4 mm hole for the tendon, and a 3.2 mm stem 3.8 mm long with a groove round it.

Two 2 mm steel balls sit in the holes; a ring of 0.4 mm spring wire in the outside groove presses them into the stem's groove. The wire sets the pull-out force: about 60 N, set and recorded at TRL 4.

Fits: one on each finger line, just in front of its balance pulley.

Check: the plug pulls out and clicks back by hand at the set force.

FLEXHAND

[github.com/BoujeeEnjinia1701/flexhand](https://github.com/BoujeeEnjinia1701/flexhand)

FlexHand breakaway coupling (make 8): making sketch

|                                                                                                 |             |                                                                                                     |                    |                 |                                             |
|-------------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------|--------------------|-----------------|---------------------------------------------|
| DRAWING NO.<br>FXH-DWG-106                                                                      |             |                                                                                                     | REV<br>P1          | SHEET<br>1 of 1 | SIZE<br>ANSI B                              |
| SCALE<br>5:1                                                                                    | UNITS<br>mm | PROJECTION<br> | DATE<br>2026-10-01 |                 | DRAWN<br>Amish Chadha                       |
| MATERIAL / NOTES<br>PA12 print service (or brass, turned); 2 mm steel balls; 0.4 mm spring wire |             |                                                                                                     |                    |                 |                                             |
| Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com                              |             |                                                                                                     |                    |                 | Generated from cad/src; do not edit by hand |