



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

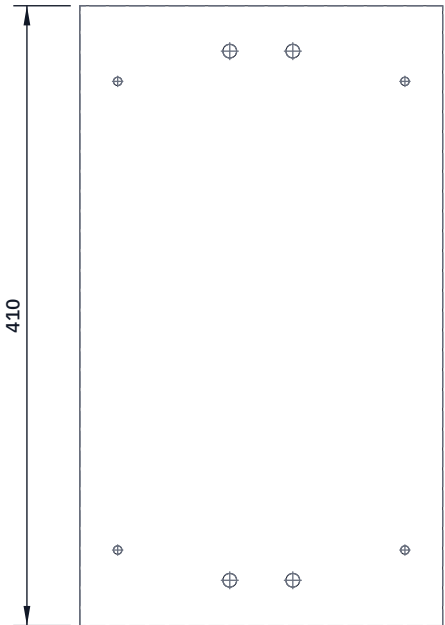


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

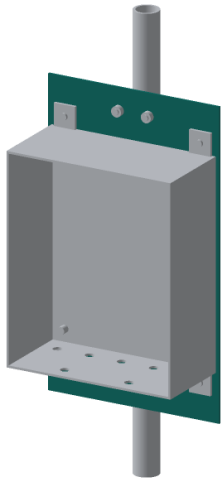

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 240 wide x 410 tall from 3 mm aluminium; round the corners 5 mm.

Mark a vertical centre line and a horizontal line across the middle.

Clamp holes: two pairs of 9 mm holes, 42 mm apart across the centre line, 175 mm above and 175 mm below the middle line.

Lug holes: four 5.5 mm holes, 95 mm each side of the centre line, 155 mm above and below the middle line. Check them against the lugs of your box before drilling.

Deburr every hole and edge.

Fit: the plate sits on two V-saddles on the outer face of the mast, held by two U-bolts; the box back sits flat on its front face.

Check: offer the box with its lugs fitted; all four holes line up.

GRAINGUARD

github.com/BoujeeEnjinia1701/grainguard

GrainGuard enclosure mounting plate: making sketch

DRAWING NO. GGD-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 3 mm, 5052 or 6061 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	