



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 2:1; looking down (along -Z)

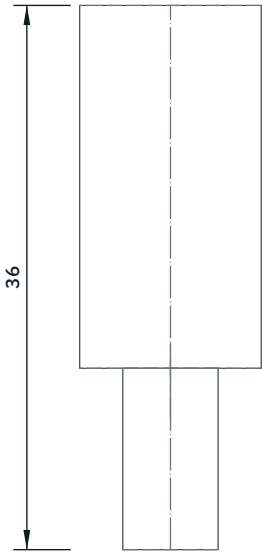


FRONT VIEW

Scale 2:1; looking at the front (along +Y)

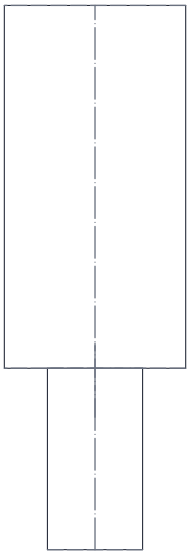

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

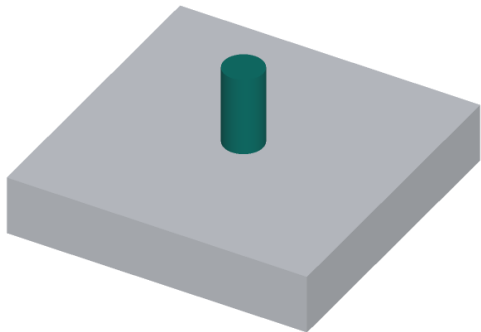

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print six in PETG standing upright: head 12 mm across, 24 mm tall, with a spigot 6.3 mm across and 12 mm long below it.

The spigot drops into any 6.6 mm plain hole; the head is the stop.

For heavy use, press a 6 mm steel dowel into a 5.8 mm hole printed through the head instead of the printed spigot.

Check: the spigot drops into a plain hole by hand and does not rock more than about 0.3 mm at the top.

GRIDBENCH

github.com/BoujeeEnjinia1701/gridbench

GridBench stop pin (make 6): making sketch

DRAWING NO. GBN-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	
MATERIAL / NOTES PETG, 3D printed					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	