


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

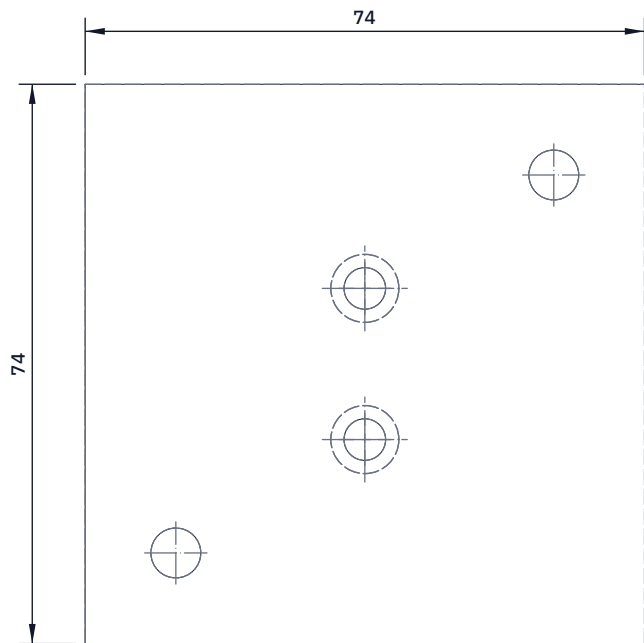


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

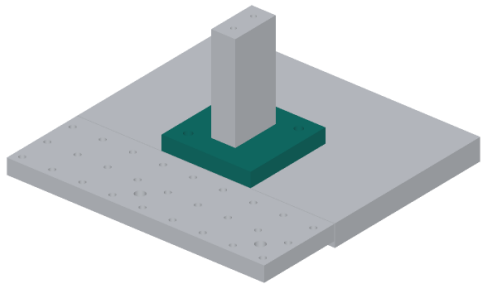

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print flat in PETG at 100 % infill: 74 x 74 x 12 mm.

Two 6.6 mm holes at opposite corners, 25 mm from the centre both ways (on the threaded 50 mm sub-grid), for M6 x 30 cap screws.

Two 5.5 mm holes on the centre line, 10 mm each side of the centre, counterbored 9 mm, 5 mm deep, from the underside, for the M5 x 20 screws that go up into the extrusion.

Fit: the extrusion stands on its top face, its 40 mm side front to back; the foot screws down onto any two threaded grid positions.

Check: the extrusion stands square to the foot.

GRIDBENCH

github.com/BoujeeEnjinia1701/gridbench

GridBench instrument post foot: making sketch

DRAWING NO. GBN-DWG-114			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 100 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	