



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

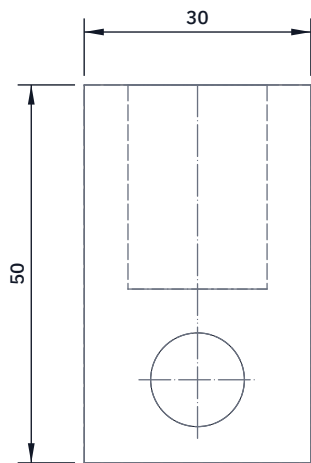


TOP VIEW

Scale 1:1; looking down (along -Z)




FRONT VIEW

Scale 1:1; looking at the front (along +Y)

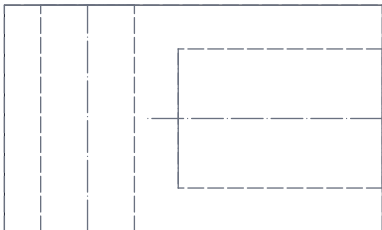

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

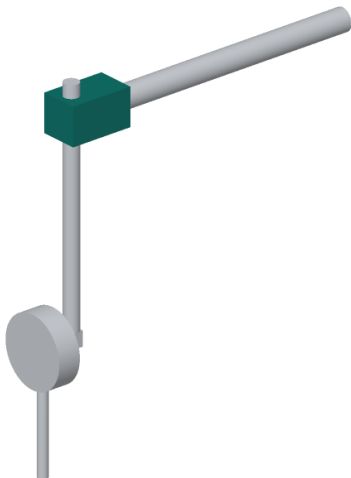

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print in PETG at 100 % infill: 30 wide, 50 deep, 30 tall.
Arm bore 18.4 mm from the back face, 27 mm deep (blind).
Drop rod bore 12.4 mm top to bottom, its centre 14 mm in front of the block's centre, so it passes 6 mm in front of the arm's end.
Hex pockets and 6.6 mm holes for two M6 thumb screws, one onto the arm and one onto the drop rod.
Fit: on the end of the arm; the 12 mm drop rod slides up and down in it and carries the dial indicator by its lug back.
Check: the drop rod stands upright when the arm is level.

GRIDBENCH

github.com/BoujeeEnjinia1701/gridbench

GridBench end clamp (arm to drop rod): making sketch

DRAWING NO. GBN-DWG-116			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 100 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	