


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

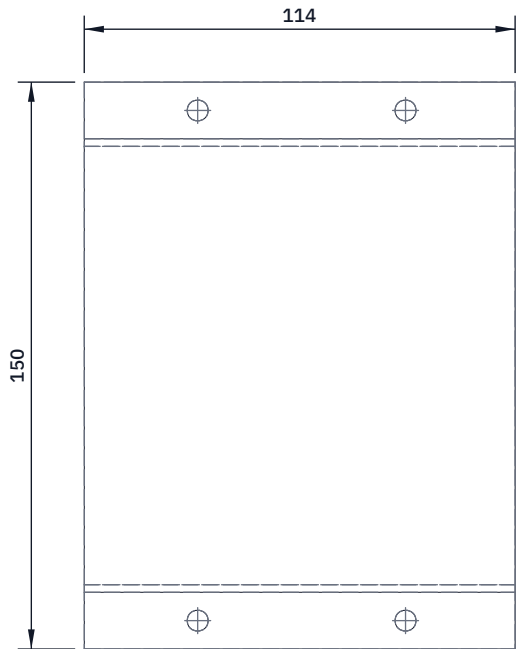


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

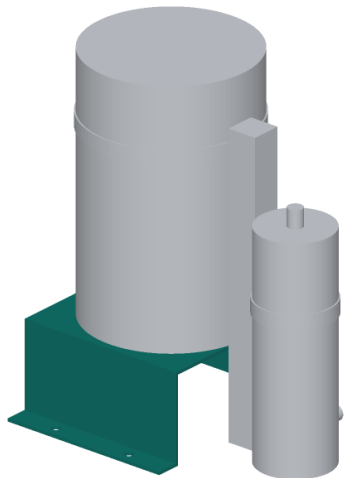

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut a blank 114 wide x about 260 long (top 120, legs 58, feet 15; check the bend allowance on a scrap first).

Fold the legs down 90 degrees along the two long-side lines, then fold the feet outward 90 degrees at the bottom of each leg.

Top 114 x 120 mm, 60 mm above the deck.

Drill two 5.5 mm holes in each foot, 30 and 85 mm from the left edge, for 5 mm deck screws.

Fit: feet flat on the deck, left edge against the left front post, front foot against the drip lip.

The reservoir stands on the top, held by a band clip to the water post (sheet HBN-DWG-103).

Check: the top is level; the stand does not rock.

H2BENCH			github.com/BoujeeEnjinia1701/h2bench		
H2Bench reservoir stand: making sketch					
DRAWING NO. HBN-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 2 mm, 5052 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		