


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

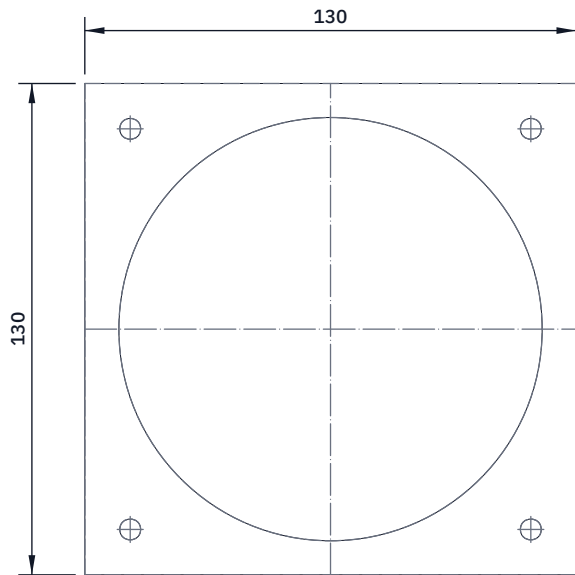


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

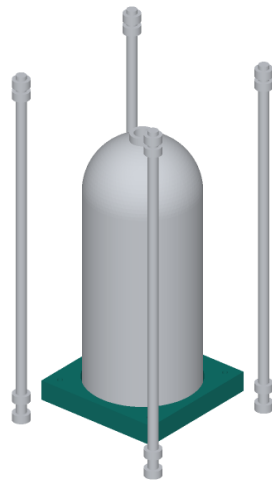

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut a 130 x 130 mm square from 20 mm HDPE.

Bore a pocket 112 mm diameter, 10 mm deep, centred, with a router and circle jig or a hole saw and chisel.

Four 5.5 mm holes 12 mm in from each corner, for 5 mm self-tapping deck screws.

Fit: the cradle sits on the deck inside the four guard rods (8 mm clear of their nuts); the tank stands in the pocket, 1 mm clear all round.

Check: the tank drops in and stands upright without rocking.

H2BENCH

github.com/BoujeeEnjinia1701/h2bench

H2Bench tank cradle: making sketch

DRAWING NO. HBN-DWG-111			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES HDPE sheet 20 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand