




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

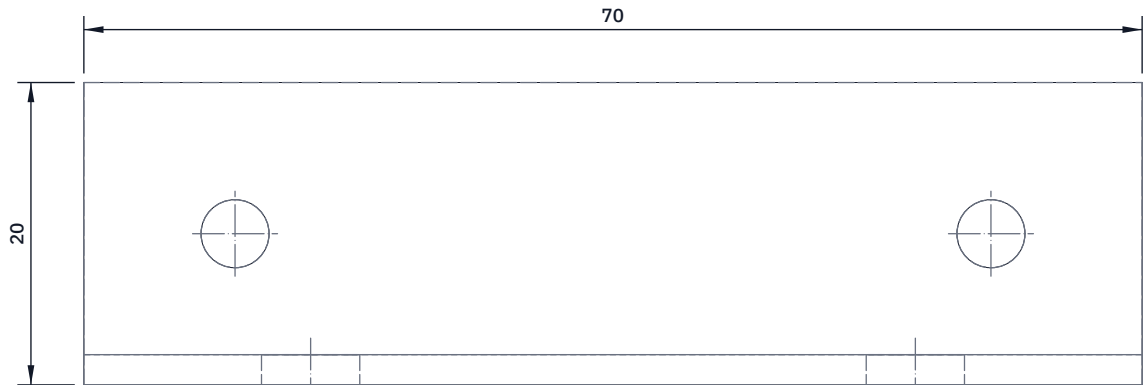


TOP VIEW
Scale 2:1; looking down (along -Z)

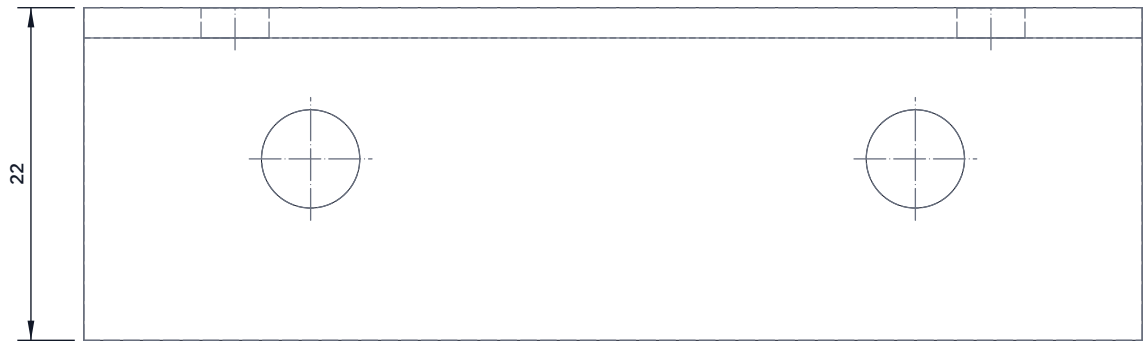

FRONT VIEW
Scale 2:1; looking at the front (along +Y)



RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

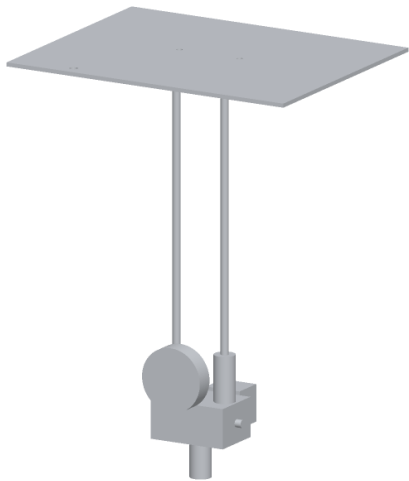

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut a 70 mm length of 20 x 20 x 2 angle; deburr.
Flat leg: two 4.5 mm holes, 10 mm from the bend, 10 mm in from each end, for M4 screws up through the canopy.
Hanging leg: two 6.5 mm holes for tube clips, 15 mm and 55 mm from the left end, 10 mm below the canopy.
Fit: screwed under the canopy above the tank manifold. The relief and vent lines are clipped to the hanging leg and end 7 mm below the canopy, so the gas leaves into the hood.
Check: both line ends open and pointing up.

H2BENCH		github.com/BoujeeEnjinia1701/h2bench		
H2Bench outlet hanger: making sketch				
DRAWING NO. HBN-DWG-114		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Aluminium equal angle 20 x 20 x 2 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	