



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

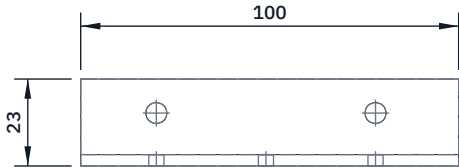


TOP VIEW
Scale 1:2; looking down (along -Z)

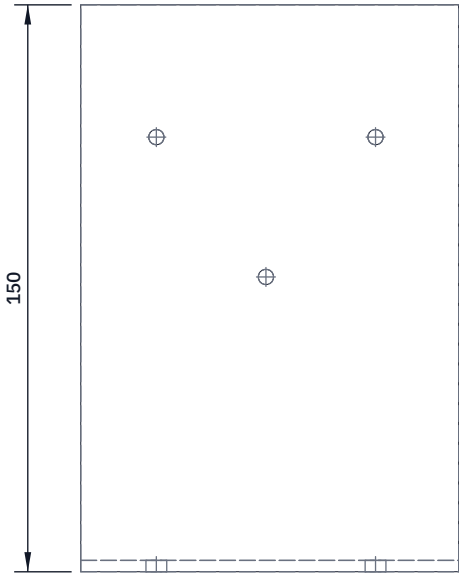

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

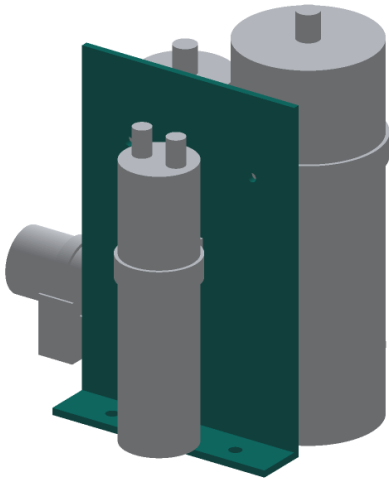

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut a blank 100 wide x 170 long.
Fold the bottom 23 mm back 90 degrees to make a foot.
Upright face 100 wide x 150 tall.
Drill two 5.5 mm holes in the foot, 14 mm behind the face, at 20 and 78 mm from the left edge, for 5 mm deck screws.
Drill two 4 mm clip holes 115 mm above the deck, at 20 and 78 mm from the left edge (the separator and drier centres).
Drill a third 4 mm clip hole 78 mm above the deck, 49 mm from the left edge, for the deoxidizer clip.
Fit: stands 5 mm behind the separator; the foot points back.
The separator and drier clips screw to it; the deoxidizer stands on the foot and is clipped to it.
Check: upright square to the deck; the clips line up with the column centres.

H2BENCH			github.com/BoujeeEnjinia1701/h2bench		
H2Bench column bracket: making sketch					
DRAWING NO. HBN-DWG-109		REV P1	SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 3 mm, 5052 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		