



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

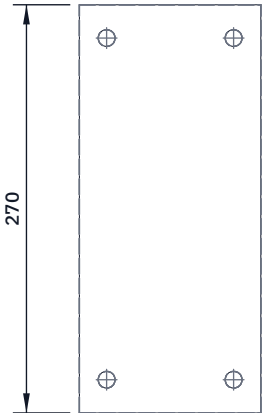


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

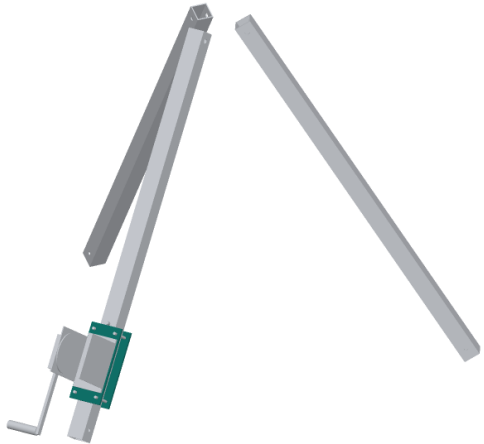

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Two plates 120 x 270 x 8, front and back of leg A
- Four 11 mm holes 42 each side of the centre line, 22 from each end, drilled through both plates together
- Front plate: four winch base holes to suit the winch bought
- Fit nylon strips 2 mm between plates and the leg
- Top edge of both plates bears on the M12 stop bolt
- Clamp bolts M10 x 90 A4 with nylocks; snug, not crushing
- Fits: winch base bolts flat to the front plate, drum across the leg, crank to the right as you face the leg

HATCHSIDE

github.com/BoujeeEnjinia1701/hatchside

Winch bracket and clamp plate: making sketch

DRAWING NO. HTS-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 8 mm S275 plate, hot-dip galvanized; A4 bolts					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand