


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:2; looking down (along -Z)

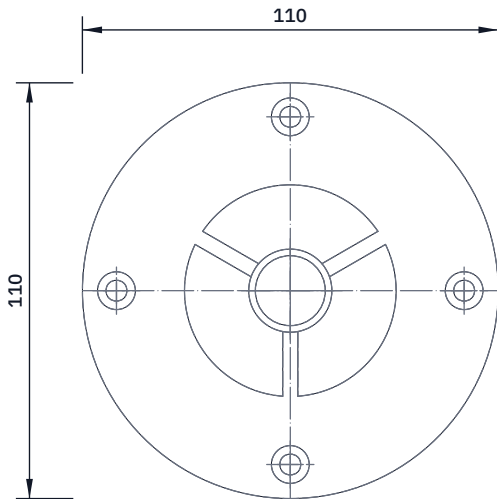

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

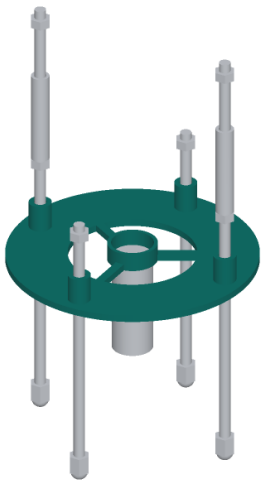

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print seven ring plates flat, bosses up: 110 mm across, 3 mm thick, with a 56 mm centre hole. Print six without the hub.

Four bosses 10 mm across and 12 mm tall stand on each ring around 5.5 mm rod holes on a 92 mm circle. Each boss carries the plate above, so the plates sit 15 mm apart with 12 mm air gaps.

The seventh ring (the third plate from the top) also has a hub 22 mm across and 8 mm tall on three 4 mm spokes; its 18.5 mm bore holds the sensor capsule. Add a 2.5 mm side hole in the hub and tap or thread-form it M3 for a nylon set screw.

Fit: the rods pass through the bosses; nothing is glued.

Check: eight plates stack 108 mm tall on the rods, gaps even.

HeatMap Node ring plates (make 7; one with the sensor hub): making sketch

DRAWING NO. HMN-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES UV-stable white ASA, 3D printed					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	