BUILD PLAN SKETCH, PLAN NOT YET BUILT

HeatMap Node · github.com/BoujeeEnjinia1701/heatmap-node

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

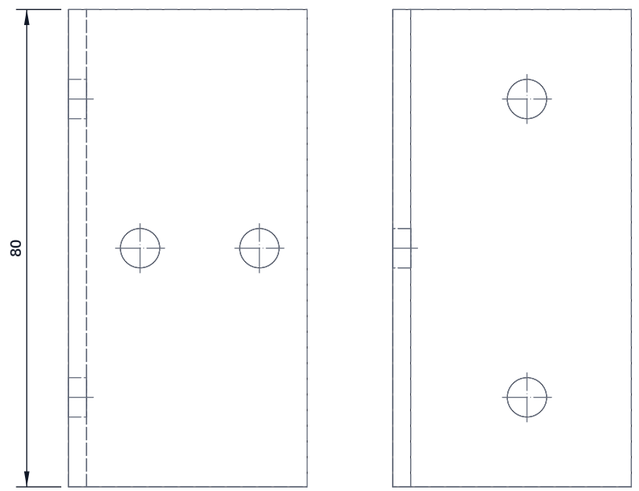

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 80 mm lengths of 40 x 40 x 3 angle; square and deburr the ends.
Flat leg (goes on the saddle web): two 6.6 mm holes, 22.5 from the outside corner of the angle, 15 and 65 up from the bottom end.
Upright leg (grips the arm): two 6.6 mm holes at mid-height (40 up), 12 and 32 out from the outside face of the flat leg.
Left and right cheeks are mirror images: clamp the upright legs back to back and drill them together so the holes line up.
Fit: flat leg flat on the web front, the arm between the two upright legs. M6 button-head screws from inside the saddle hold the flat leg; two M6 bolts pass through both cheeks and the arm.
Check: with the arm between them both upright legs touch the arm.

HEATMAP NODE

github.com/BoujeeEnjinia1701/heatmap-node

HeatMap Node arm cheek (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
HMN-DWG-102	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Aluminium equal angle 40 x 40 x 3 mm, 6063

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand