



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

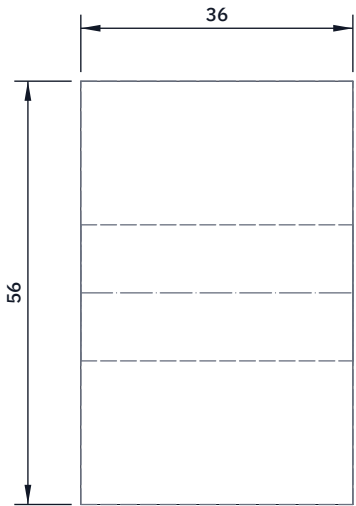


TOP VIEW

Scale 1:1; looking down (along -Z)

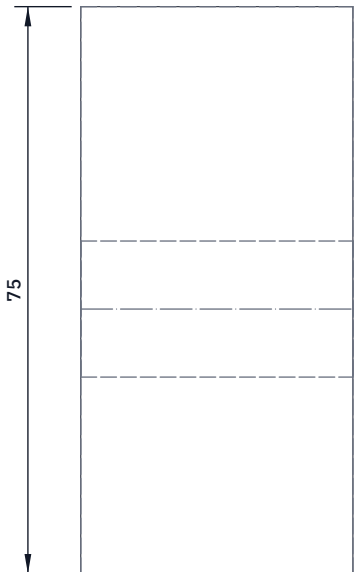

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

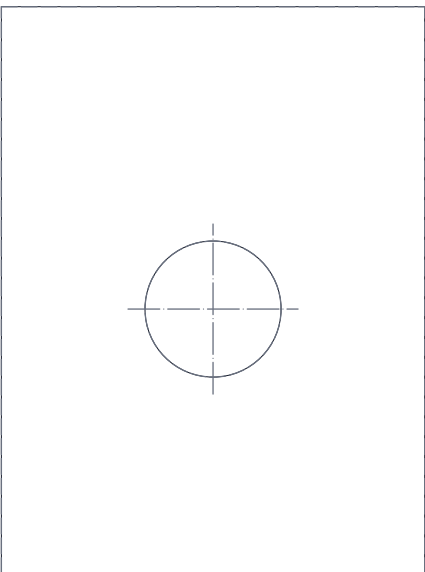

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print a block 36 x 56 x 75 mm with an 18 mm hole across its 36 mm thickness, centred, 40 mm below the top face.

Print it standing on its 36 x 56 end so the hole axis is horizontal; six walls so screws bite in solid plastic.

Fit: pressed into the top of each arm, top faces flush; the bronze bush passes through arm side, plug and arm side.

Drill the bolt holes (gearbox, latch, spring can) through the plug from the arm's holes once it is in place.

The plug spreads the bolt loads and keeps the thin tube walls from crushing.

Check: a firm press fit; the hole lines up with the arm's 18 mm holes so the bush slides through.

HELIOLITE

github.com/BoujeeEnjinia1701/heliolite

HelioLite bearing plug (make 2, printed): making sketch

DRAWING NO. HLT-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES ASA, printed; 6 walls, 60 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand