

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW
Scale 1:1; looking down (along -Z)



FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

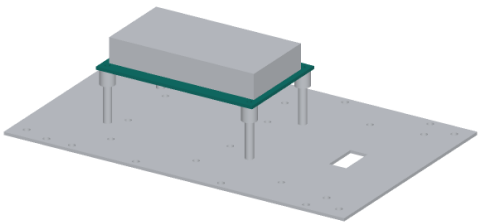

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 110 x 70 mm from 2 mm G10 with a fine-tooth saw; wear a mask (glass dust) and file the edges smooth.

Damper holes 3.4 mm at 5 mm in from each end, 5 mm in from each long edge (100 x 60 mm pattern).

Flight controller holes: mark from the controller's own mounting pattern, centred on the plate, and drill 3.2 mm.

The controller is fixed with M3 nylon screws and its arrow points forward (+X, toward the cable slot).

Check: the plate hangs level on the four dampers and nothing touches it except the dampers.

KITEWRIGHT CORE				github.com/BoujeeEnjinia1701/kitewright-core			
Kitewright Core damping plate: making sketch							
DRAWING NO. KWC-DWG-108			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES G10 / FR4 glass-epoxy sheet 2 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			