



CONCEPT, NOT FOR FABRICATION

LeakListen · github.com/BoujeeEnjinia1701/leaklisten

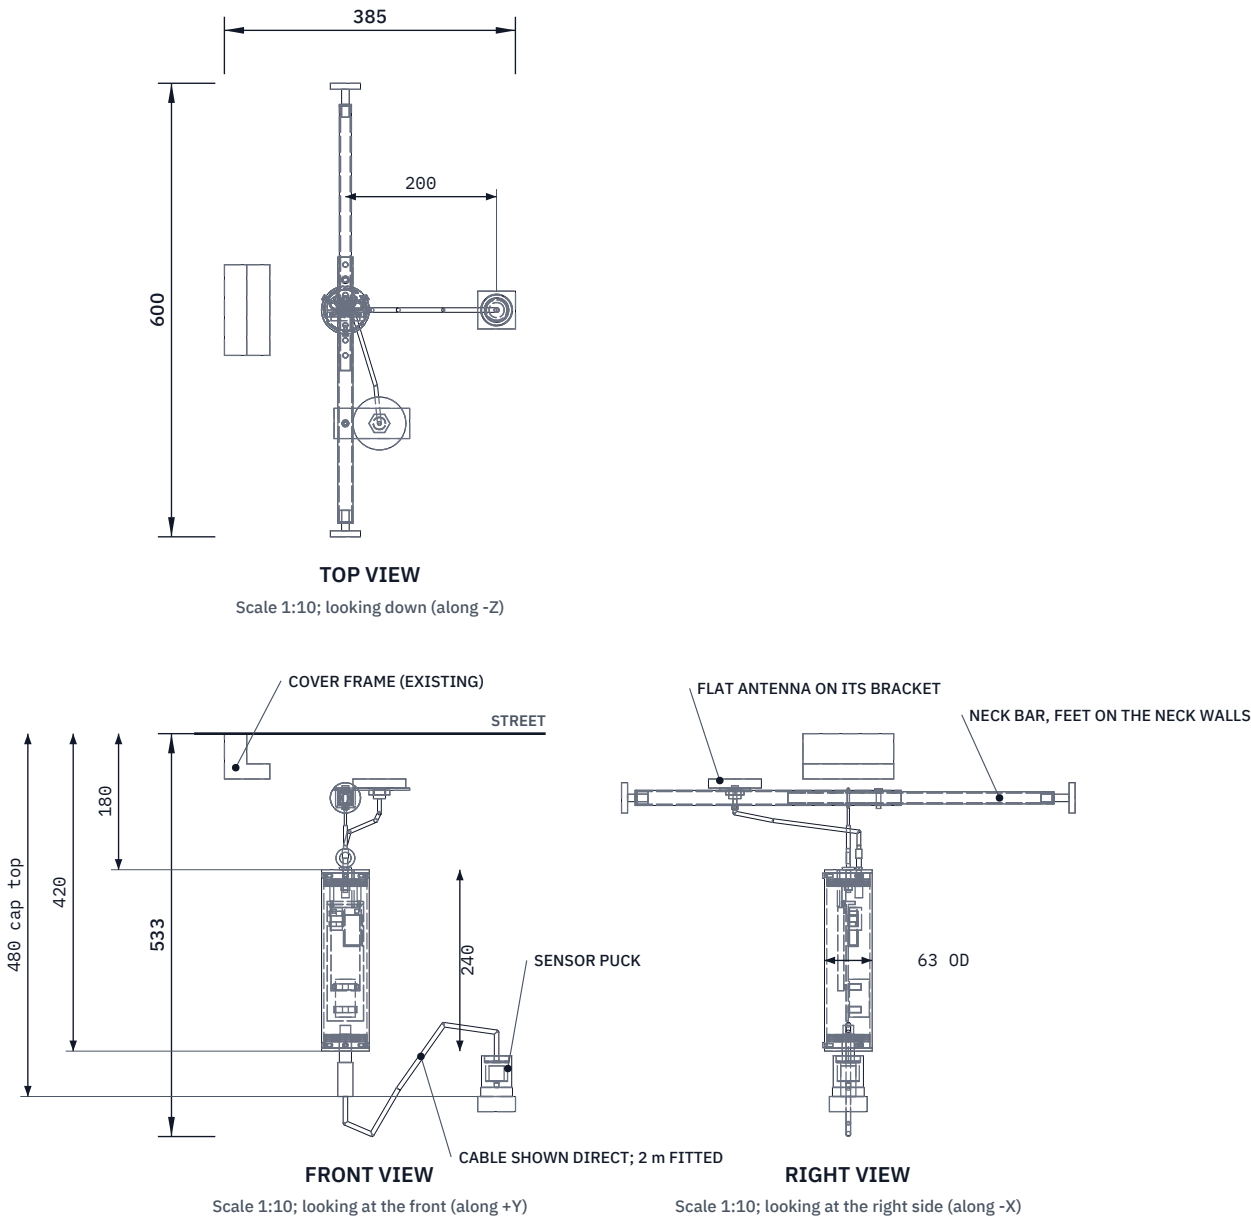

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	42 mm pot magnet (LKL-DDR-002)	2026-09-25	AC
P3	Layout and labels tidied	2026-09-25	AC
P4	Constructable design: neck bar, end plugs, chassis (LKL-DDR-003)	2026-10-01	AC
P5	Status light pipe added to the top plug (decision of 2026-10-02)	2026-10-02	AC

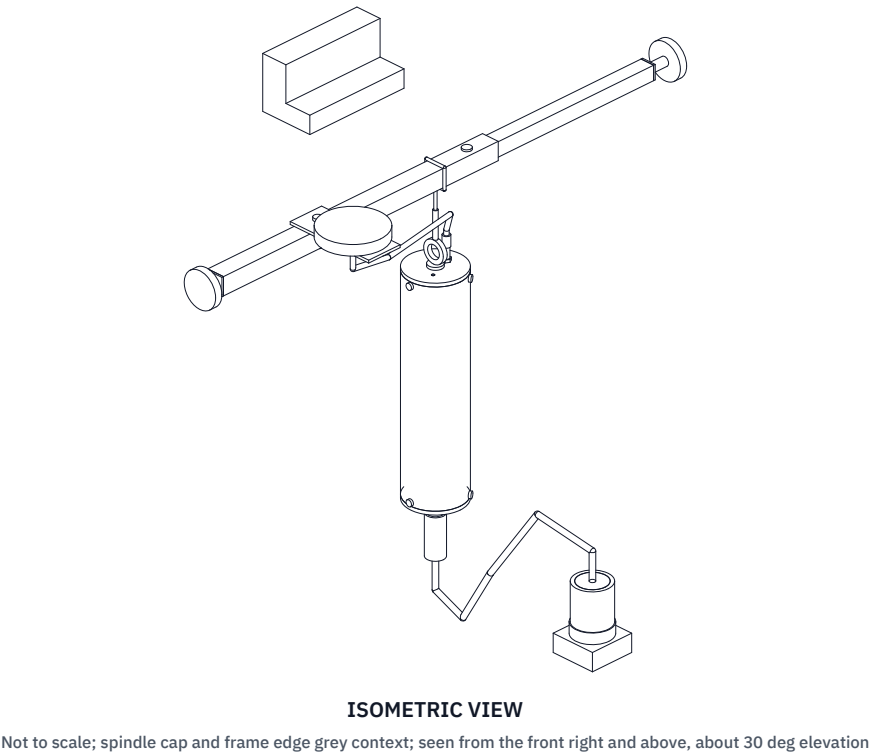

MAIN DIMENSIONS AND INTERFACES (MM)

Logger PVC tube 63 OD x 3 wall, flanged acetal end plugs; 240 flange to flange, 283 with socket and eye bolt

Sensor puck 40 x 42 aluminium on a 42 mm pot magnet (keeper plate in transport); stack 54

Seismic mass brass 20 x 20 on a 27 mm piezo disc (compression)

Spindle cap 50 square, top 480 below street (example site)

Neck bar 20 and 16 square aluminium tube, rubber feet on the neck walls; lanyard 3

Flat antenna 70 dia on a bracket on the bar, 20 gap below the 40 cover

Top plug: eye bolt, SMA bulkhead and a 3 mm status light pipe rod

Sensor cable 2 m, M12 IP68; reaches caps to about 2.2 m deep

No chamber entry; nothing touches drinking water

LEAKLISTEN			github.com/BoujeeEnjinia1701/leaklisten		
General arrangement, logger installed					
DRAWING NO. LKL - DWG - 001		REV P5	SHEET 1 of 1	SIZE ANSI B	
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha	
MATERIAL / NOTES PVC, aluminium, stainless; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		