
CONCEPT, NOT FOR FABRICATION


LeakListen · github.com/BoujeeEnjinia1701/leaklisten

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC
P2	42 mm pot magnet (LKL-DDR-002)	2026-09-25	AC
P3	Layout and labels tidied	2026-09-25	AC
P4	Constructable design: neck bar, end plugs, chassis (LKL-DDR-003)	2026-10-01	AC
P5	Status light pipe added to the top plug (decision of 2026-10-02)	2026-10-02	AC
P6	Drawn from the kit 1.9 detailed model (72 parts)	2026-11-01	AC




TOP VIEW

Scale 1:20; looking down (along -Z)

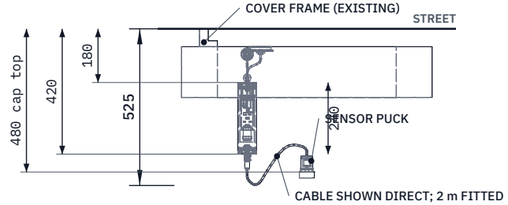


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

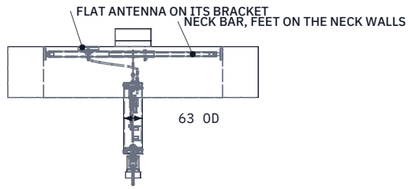

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

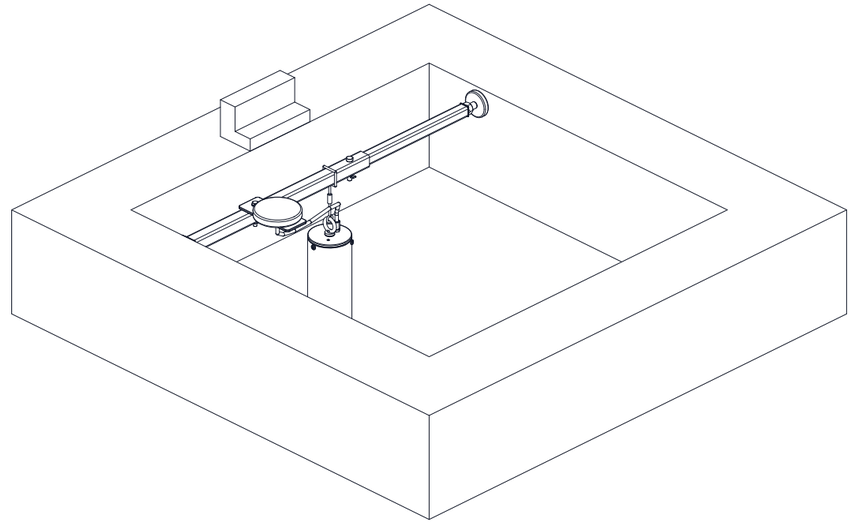

ISOMETRIC VIEW

Not to scale; spindle cap and frame edge grey context; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Logger PVC tube 63 OD x 3 wall, flanged acetal end plugs; 240 flange to flange, 283 with socket and eye bolt
Sensor puck 40 x 42 aluminium on a 42 mm pot magnet (keeper plate in transport); stack 54
Seismic mass brass 20 x 20 on a 27 mm piezo disc (compression)
Spindle cap 50 square, top 480 below street (example site)
Neck bar 20 and 16 square aluminium tube, rubber feet on the neck walls; lanyard 3
Flat antenna 70 dia on a bracket on the bar, 20 gap below the 40 cover
Top plug: eye bolt, SMA bulkhead and a 3 mm status light pipe rod
Sensor cable 2 m, M12 IP68; reaches caps to about 2.2 m deep
No chamber entry; nothing touches drinking water

LEAKLISTEN

github.com/BoujeeEnjinia1701/leaklisten

General arrangement, logger installed

DRAWING NO.	REV	SHEET	SIZE
LKL-DWG-001	P6	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:20	mm		2026-11-01	Amish Chadha

MATERIAL / NOTES

PVC, aluminium, stainless; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand