REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

TOP VIEW

Scale 1:2; looking down (along -Z)

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

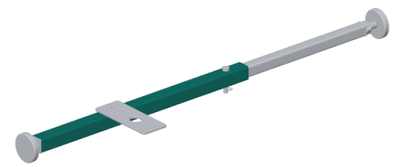

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 350 mm of 20 x 20 x 1.5 mm square tube; square and deburr.
Measure from the foot end (the end that takes the fixed foot):
bracket bolt hole 5.5 mm at 130 mm, top and bottom walls;
locking pin hole 6.5 mm at 320 mm, top and bottom walls.
Drill each pair straight through both walls in a drill stand so
the holes line up.
Press a 20 x 20 tube insert with an M10 nut into the foot end.
Fit: the inner tube slides into the other end with 0.5 mm
clearance; the pin goes through both tubes.
Check: the inner tube slides the full length without binding.

LEAKLISTEN github.com/BoujeeEnjinia1701/leaklisten

LeakListen neck bar outer tube: making sketch

DRAWING NO.	REV	SHEET	SIZE
LKL-DWG-107	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES
Aluminium square tube 20 x 20 x 1.5 mm, 6063

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand