REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

TOP VIEW

Scale 1:2; looking down (along -Z)

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

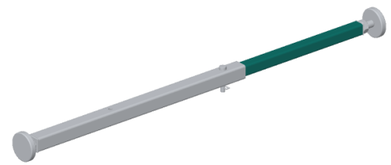

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 350 mm of 16 x 16 x 1.5 mm square tube; square and deburr.
Seven locking pin holes, 6.5 mm, through the top and bottom walls,
20 mm apart, the first 20 mm from the plain end (20 to 140 mm).
Press a 16 x 16 tube insert with an M10 nut into the far end.
Fit: slide into the outer tube; choose the hole that sets the bar
about 20 mm short of the neck width, fit the pin and R-clip,
then wind the feet out to take up the last 20 mm.
With the 7 holes and about 30 mm of foot travel the bar spans
necks of about 570 to 710 mm (600 mm as drawn, hole 6 of 7).
Check: the pin drops through both tubes at every hole.

LEAKLISTEN github.com/BoujeeEnjinia1701/leaklisten

LeakListen neck bar inner tube: making sketch

DRAWING NO.	REV	SHEET	SIZE
LKL-DWG-108	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES
Aluminium square tube 16 x 16 x 1.5 mm, 6063

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com
Generated from cad/src; do not edit by hand