


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

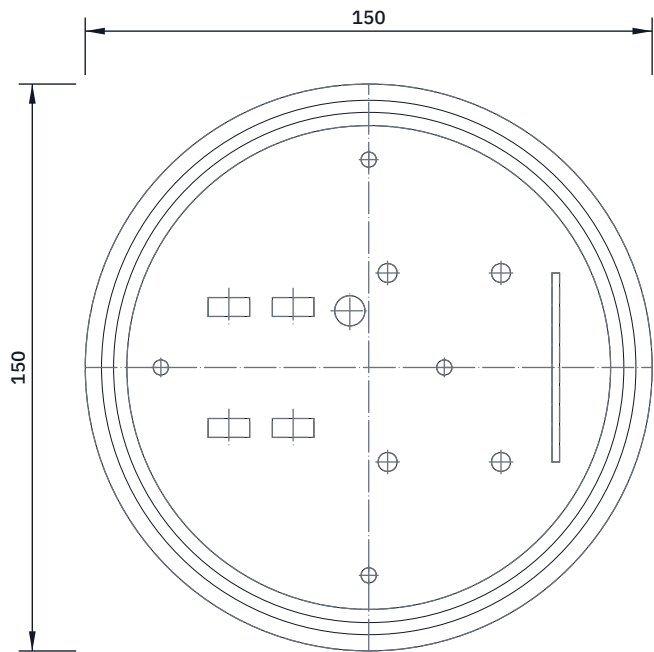


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

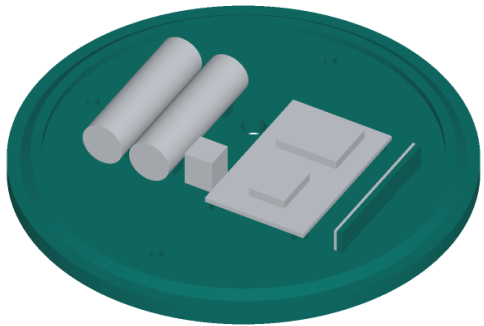

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Disc 150 mm across, 6 mm thick; road side flat. The tray layout picture gives every position from the centre.

Locating ring: tapered, 141.4 mm across at the disc, 135.0 mm at its top, 2.5 mm tall, 128 mm inside. It fits the dome's cavity with 0.3 mm all round.

Cell cradles: two per cell, 11 x 5 mm, 4 mm tall, saddle-shaped, centred 37 and 20 mm left of centre, 16 mm each side.

Board standoffs: four, 5 mm across, 3 mm tall, 1.6 mm pilot hole for M2 screws, at 5 and 35 mm right, 25 mm each side.

Antenna rib: 2 x 50 mm, 8 mm tall; its inner face 48.5 mm right.

Holes through the disc: fill 8 mm; four 4 mm vents (layout).

Print disc down in an enclosed printer. Sand the road side with 80 grit so the epoxy bed keys to it.

Check: the dome drops over the ring and sits flat on the disc.

LoadZone base tray (make 2): making sketch

DRAWING NO. LDZ-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES ASA, 3D printed, 100 % infill in the disc					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	