BUILD PLAN SKETCH, PLAN NOT YET BUILT

LumaFlow · github.com/BoujeeEnjinia1701/lumaflow

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

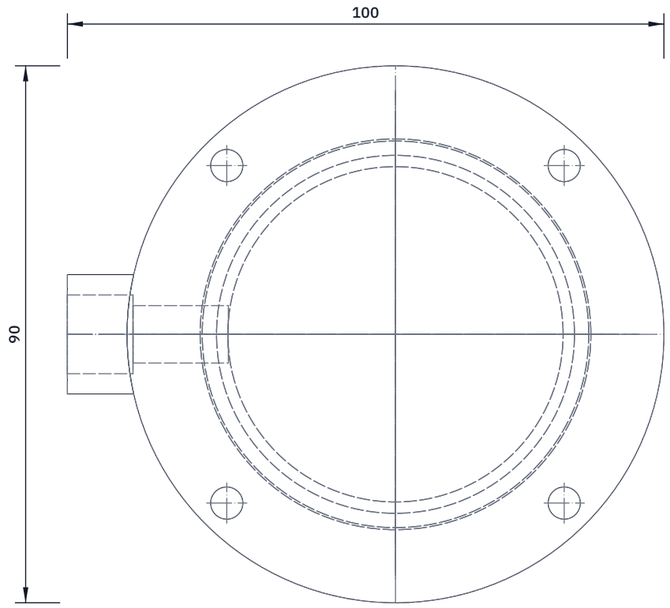

TOP VIEW

Scale 1:1; looking down (along -Z)

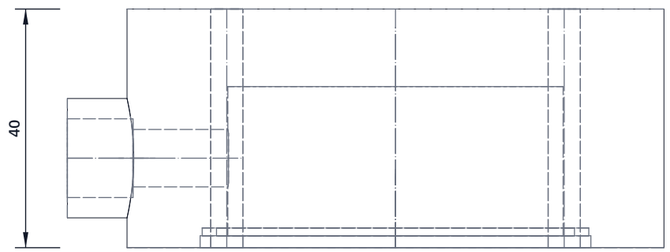

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

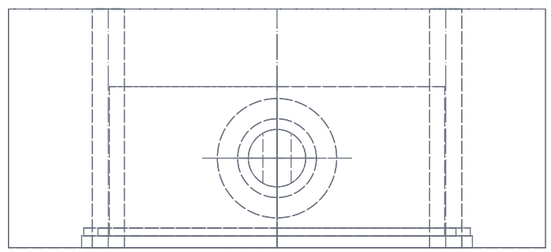

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

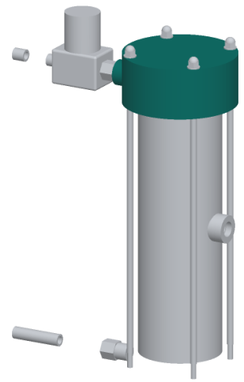

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Turn to 90 dia x 40. Bottom face (tube side) down in the views.
Bottom face: tube seat 65.5 dia x 2 deep; in its floor an O-ring groove 60 to 64.8 dia, 1.3 deep.
Liner pocket 56.2 dia from the seat floor up to 27 from the bottom face. The 13 mm left above it is the pressure roof.
Outlet boss 20 dia on the left, centre 15 up, face 55 from the axis; tap 1/4 BSPP 11 deep, then bore 9.6 through to the pocket.
Outlet sleeve: 316 tube 9.5 x 7, 17 long, pressed into the 9.6 bore from the thread end until it meets the liner.
Four 5.4 mm holes on an 80 circle, at 45 deg, for the studs.
Check: the liner's turned top enters the pocket by hand.

LUMAFLOW

github.com/BoujeeEnjinia1701/lumaflow

LumaFlow upper end cap: making sketch

DRAWING NO.	REV	SHEET	SIZE
LMF-DWG-108	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Acetal (POM) food-contact grade round bar 95 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand