



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

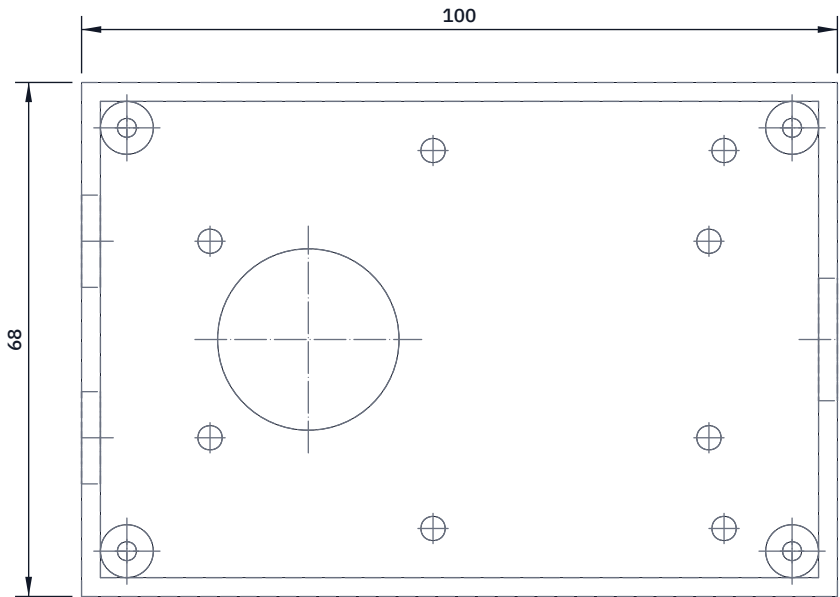

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

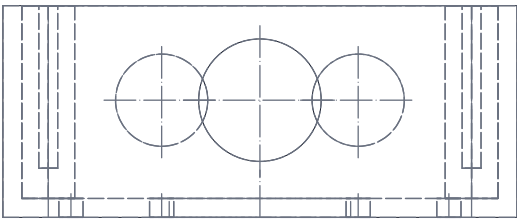

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

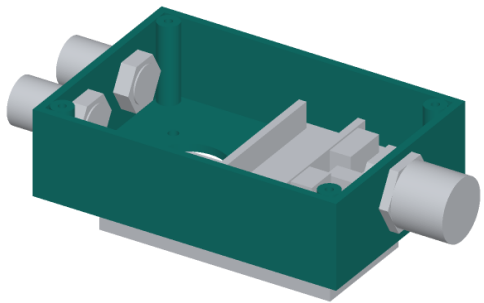

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A stock ABS box base with four moulded corner pillars. Drill only.
Sizes are from the box's centre lines; the drilling layout repeats them.
Floor, 24 mm boss hole: 20 mm left of centre, on the centre line.
Floor, four 3.2 mm stand-off screw holes: 33 mm each side, 13 mm each side of the centre line.
Floor, four 3.2 mm carrier screw holes: 3.5 mm left of centre and 35 mm right of centre, 25 mm each side of the centre line.
Left end wall: two 12.2 mm gland holes 13 mm each side of centre.
Right end wall: one 16.2 mm gland hole on the centre line.
Gland centres 15.5 mm up from the underside of the box.
Tape the face, pilot 3 mm slowly with wood behind, open with a step drill at low speed, light pressure. Deburr inside and out.
Check: each gland seats flat; the floor holes match the block's.

MACHINEPULSE			github.com/BoujeeEnjinia1701/machinepulse		
MachinePulse box base: drilling sketch					
DRAWING NO. MPL - DWG - 103		REV P1	SHEET 1 of 1		SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Bought IP54 ABS box 100 x 68 x 40 mm (base 28 mm)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		