



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW

Scale 1:10; looking down (along -Z)

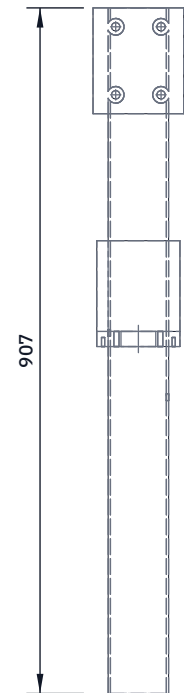


FRONT VIEW

Scale 1:10; looking at the front (along +Y)

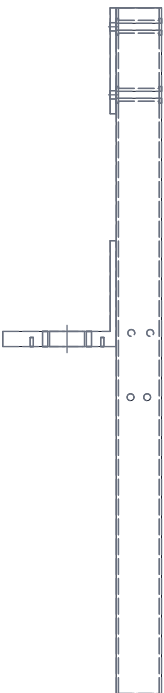

RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

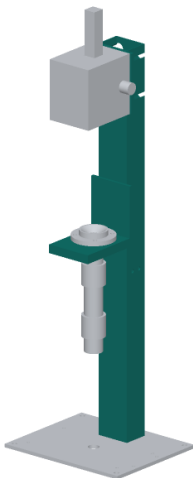

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Column: cut 907 mm of 80 x 60 x 3 mm tube, ends square. In the front and back walls drill four 22 mm access holes, 30 mm each side of centre, 25 and 115 mm below the top. In the left wall drill two 9 mm holes for M6 rivnuts, 477 mm up, 20 and 45 mm back from the front face; in the right wall two more, 392 mm up, 19 and 41 mm back (plunger rest). Shelf: 110 x 150 x 20 mm. 46 mm hole centred 65 mm from its back edge; four M8 tapped holes on an 82 mm circle at 45 degrees; three M5 holes 10 deep underneath on a 132 mm circle (front, back left, back right). Back plate 110 x 120 x 8 mm. Head plate 120 x 140 x 8 mm with four 11 mm holes at 30 mm each side, 25 mm from top and bottom, countersunk on the back so the screw heads sit flush against the column. Weld: shelf top 479 mm up the column, back edge on the front face; back plate on the shelf and the column corners; head plate flush with the top, holes on the access holes. Fillet welds 5 mm. Check: the shelf is square to the column within 0.5 mm over 100 mm.

MICROMOLD

github.com/BoujeeEnjinia1701/micromold

MicroMold column with shelf, back plate and head plate: making sketch

DRAWING NO. MMD-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Steel tube 80 x 60 x 3 mm; steel plate 20 and 8 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	