


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

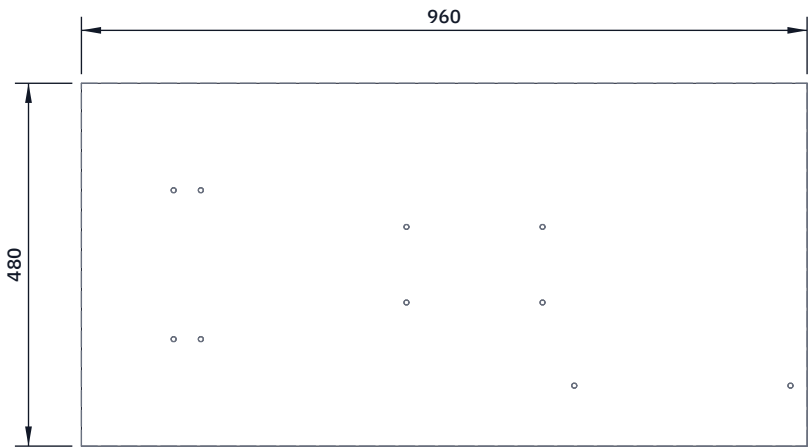


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

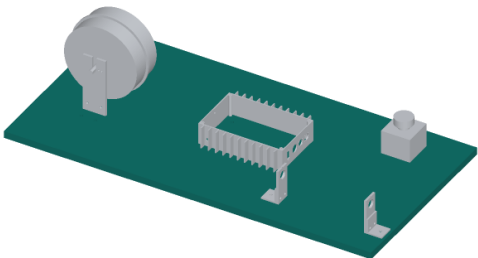

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 960 x 480 mm from 18 mm plywood; sand the edges; mark the left end (motor end) and the front edge (the brake lever side).

Module bolts: four 6.5 mm holes on a 180 x 100 mm rectangle, centred 520 mm from the left end and 240 mm from the front edge.

Motor upright feet: four 6.6 mm holes at 122 and 158 mm from the left end, 141.5 and 338.5 mm from the front edge.

Bar post feet: two 6.6 mm holes 80 mm from the front edge, at 652 and 938 mm from the left end.

E-stop station: fixed with wood screws through its base, centred 820 mm from the left end and 390 mm from the front edge.

Counterbore the bolt holes from below 13 mm, 3 mm deep, so the board sits flat on the bench.

Check: the module's rubber pads land on the four 6.5 mm holes.

MotionCore bench board: making sketch

DRAWING NO. MTC-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Plywood 18 mm, exterior grade					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand