BUILD PLAN SKETCH, PLAN NOT YET BUILT


NoiseMap · github.com/BoujeeEnjinia1701/noisemap

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

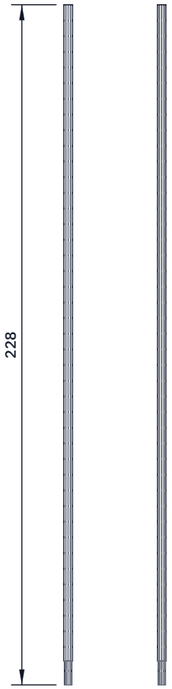


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

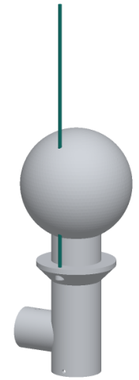

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 228 mm of 3 mm stainless rod.
Cut an M3 thread 8 mm long on one end with a die.
Round the other end slightly with a file: a blunt tip, not a point.
Fit: screws into the heat-set insert in the skirt boss, 26 mm off the head axis, and rises through the foam windscreen.
Unscrew it before you lift the windscreen off.
Check: it stands upright and its top is 160 mm above the port.

NOISEMAP

github.com/BoujeeEnjinia1701/noisemap

NoiseMap bird spike: making sketch

DRAWING NO.	REV	SHEET	SIZE
NSM-DWG-106	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Stainless steel rod 3 mm, A2 (304)

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand