


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

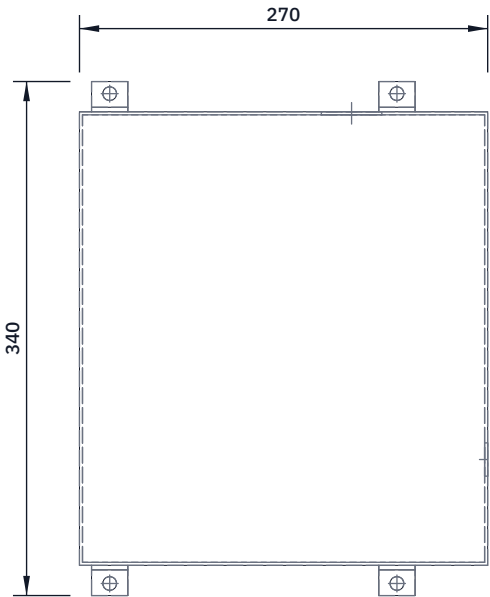


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

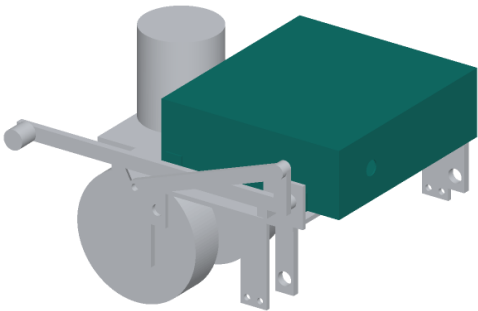

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Box: 2 mm aluminium folded to 270 long x 300 wide x 89 tall, open top, corners riveted or welded; gasket on the top flange (IP54).
Lid: 2 mm aluminium, 270 x 300 with a 6 mm down-turned edge; held by six M5 screws into rivet nuts in the box flange.
Holes: right side, 40 mm for the disconnect, 180 from the front, 45 up; rear face, 22 mm for the emergency stop, 80 left of centre, 45 up; cable glands as the wiring needs, never in the lid.
Feet (make 4): 25 x 20 x 3 angle, 24 long; 9 mm hole in the flat leg 12 from the box side. Rivet the upright leg to the box side with two 4.8 mm rivets, 20 and 210 mm from the front, bottoms flush.
Fit: the box stands on the top plate; one M8 bolt through each foot.
Check: the lid top is no more than 320 mm above the floor when fitted.

PalletPilot enclosure, lid and feet: making sketch

DRAWING NO. PLP-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 2 mm, 5052; aluminium angle 25 x 20 x 3 mm (feet)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand