


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

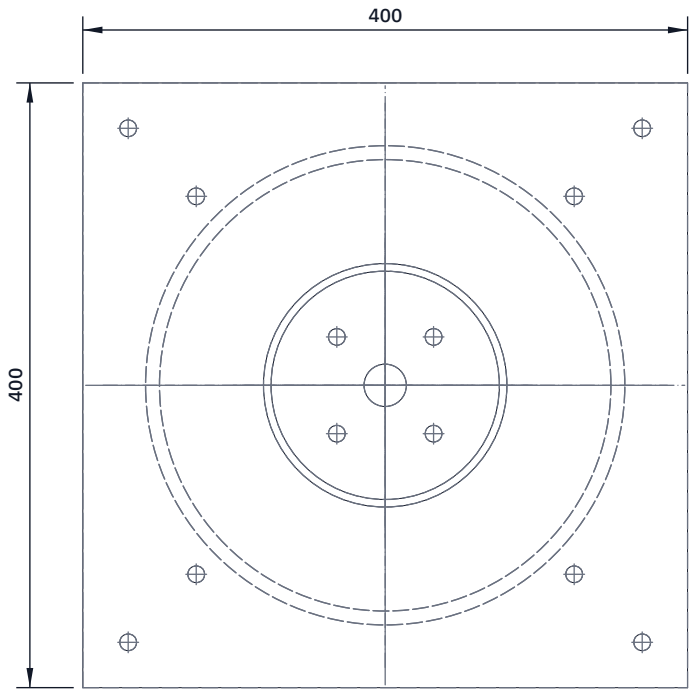


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

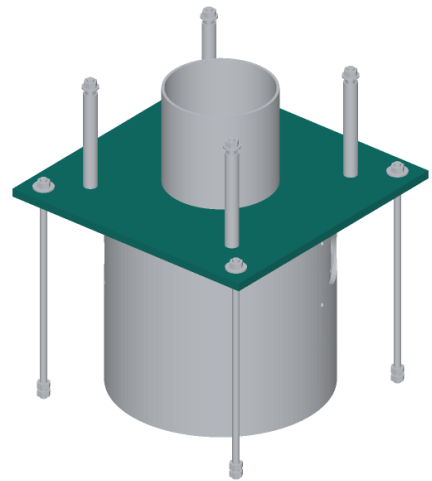

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 400 x 400 mm; round the corners to about 5 mm.

Holes from the centre (the lid hole layout figure gives all of them):

- shaft 28 mm in the centre; bearing bolts 11 mm at 32 each way;
- post rods 11 mm at 125 each way; tie rods 11 mm at 170 each way.

Underneath: a ring groove 3 mm deep, 148.8 to 158.5 mm radius, that the top of the housing sits in. Rout with a trammel jig.

On top: a ring groove 2 mm deep, 75.5 to 80.5 mm radius, for the guard.

Mark the two grooves from the same centre as the shaft hole.

Fit: housing in the lower groove; lower bearing unit, posts and guard on top; four tie rods through the corners with washers and nuts.

Check: the lid drops onto the housing and the groove takes the whole rim without forcing.

PICOFLOW

github.com/BoujeeEnjinia1701/picoflow

PicoFlow lid: making sketch

DRAWING NO. PCF-DWG-105		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES HDPE sheet 12 mm (or marine plywood, sealed)				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	