


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

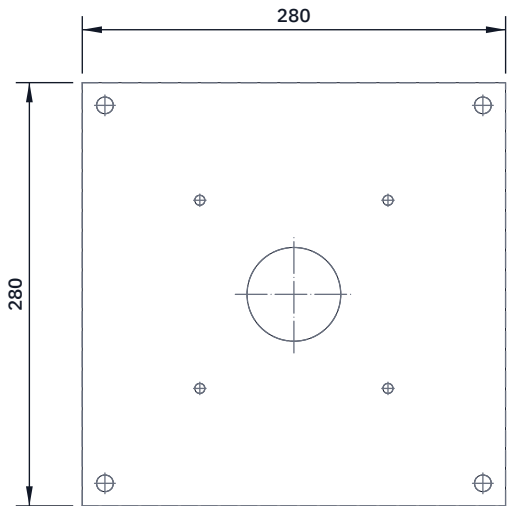


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

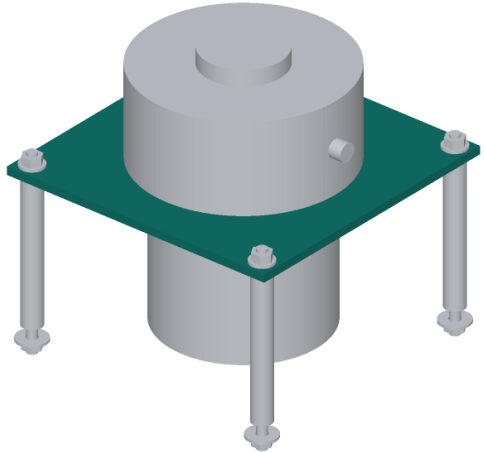

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 280 x 280 mm; file the edges and round the corners.

Centre hole 62 mm for the generator shaft and spigot (check the generator: the hole must clear its spigot by 1 mm).

Post holes 11 mm at 125 mm each way from the centre.

Generator screw holes 6.6 mm on a 176 mm circle at 45 deg (the model's figure; copy the circle and angle from the generator bought).

Mark the centre from the diagonals so the shaft lines up with the bearings below.

Fit: sits on the four posts, nuts on top; generator on top, four M6 screws from below; the guard stops 1 mm under it.

Check: the plate sits on all four posts without rocking.

PICOFLOW

github.com/BoujeeEnjinia1701/picoflow

PicoFlow generator plate: making sketch

DRAWING NO.

PCF-DWG-110

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:5

UNITS

mm

PROJECTION



DATE

2026-10-01

DRAWN

Amish Chadha

MATERIAL / NOTES

Aluminium plate 8 mm, 5083 or 6082