


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:10; looking down (along -Z)

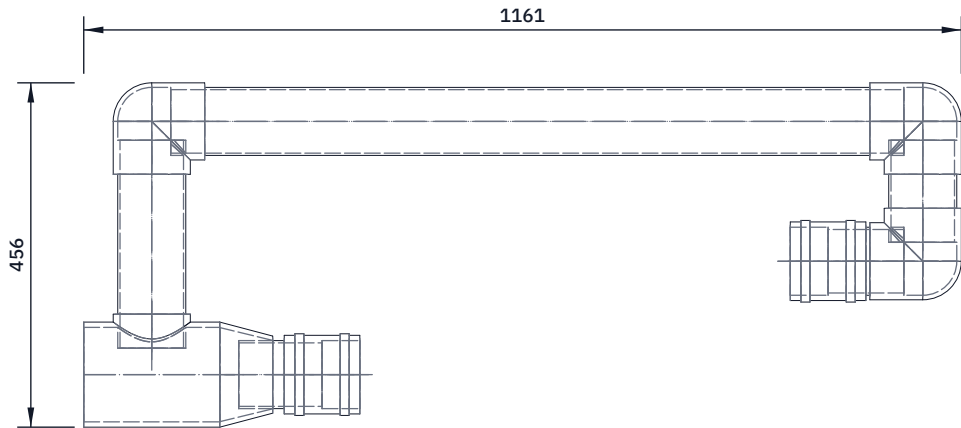


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

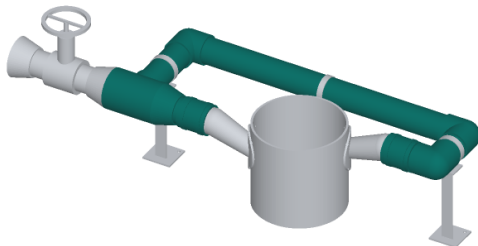

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut five lengths of 90 mm pipe (for sockets 45 mm deep; adjust each by the difference if your fittings differ):

P1 tee branch to first elbow, 275 mm; P2 long run, 970 mm;

P3 short drop, 135 mm; P4 last elbow to jet 1 coupling, 100 mm;

P5 reducer to jet 2 coupling, 110 mm.

Penstock enters the 125 mm run of the tee; the run's other end takes a 125 x 90 reducer and P5 to jet 2. The 90 mm side branch takes P1, then elbows and P2, P3, P4 round the housing to jet 1.

Dry fit everything on the stands first. Then solvent weld the PVC joints, one at a time, keeping the elbows square.

Flexible couplings join P4 and P5 to the nozzle spigots; band clamps snug, not crushed. Do not glue the nozzles.

Check: centre line 338 mm above the pad all round.

PICOFLOW

github.com/BoujeeEnjinia1701/picoflow

PicoFlow nozzle manifold pipework: cutting and fitting sketch

DRAWING NO. PCF-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 90 mm PVC pipe and fittings; 125 x 90 mm reducing tee and reducer					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	