


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

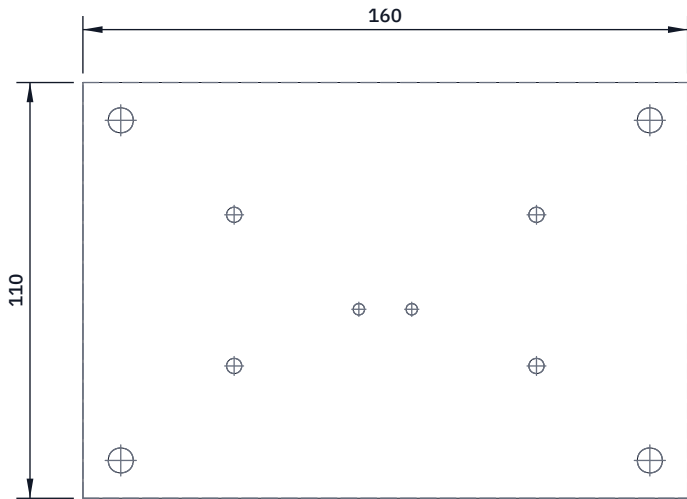


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

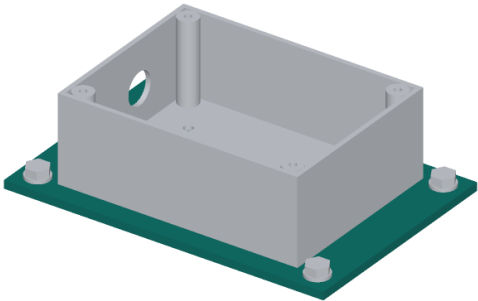

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 160 x 110 mm, 4 mm aluminium. Square the edges, deburr, round the corners to about 2 mm. Measure every hole from the plate's centre lines; the hole layout picture repeats them.

Corner holes: four 6.6 mm (M6 clearance), 70 mm each side along the length and 45 mm each side across (140 x 90 mm apart).

Box standoff holes: four M4 tapped, drill 3.3 mm and tap, 40 mm each side along and 20 mm each side across (80 x 40 apart).

IMU holes: two M3 tapped, drill 2.5 mm and tap, 7 mm each side of the cross centre line, 5 mm to the right of the long centre line.

Better: drill the IMU and standoff holes through the box floor with the box clamped on the plate, then open the floor holes.

Fit: the box floor sits flat on the top face; nothing may stick out below the plate, so the standoffs and screws stop inside it.

Check: every tapped hole takes its screw by hand.

POTHOLELOG

github.com/BoujeeEnjinia1701/potholelog

PotholeLog mounting plate: making sketch

DRAWING NO. PHL - DWG - 101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium sheet 4 mm, 5052					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	