


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW
Scale 1:10; looking down (along -Z)

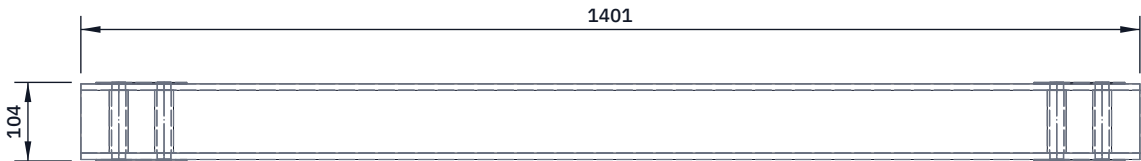

FRONT VIEW
Scale 1:10; looking at the front (along +Y)



RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

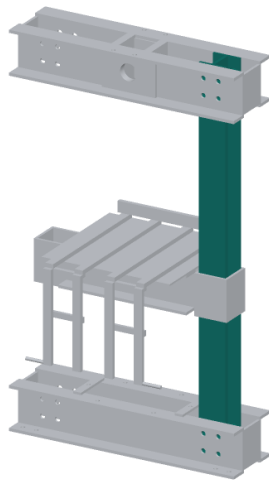

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two (drawn lying down). Two UPN 100 channels 1,401 mm, square ends, webs back to back, flanges pointing sideways. Stitch weld the two web seams, 50 mm welds every 300 mm. The pair is 100 x 100 mm.

Holes, 18 mm, through all four flanges, 28 mm each side of the web seam, at 50, 110, 1,291 and 1,351 mm up from the bottom end.

Spacer tubes: 25 x 3 mm tube cut 83 mm long (flange to flange inside), eight per pair, slid in from the open side of each channel.

Shims: 2 mm steel, 100 x 120 mm, two 18 mm holes 56 mm apart; one each side of each joint (eight per pair); add or thin to suit.

Bolts: M16 x 150 grade 10.9, hardened washer under head and nut.

Fit: the bottom end stands on the foot; the pair sits between the beam webs with a shim each side; four bolts per joint through web, shim, flange, tube, flange, shim, web.

Check: straight within 1 mm; mass about 29 kg (two people).

POTPRESS				github.com/BoujeeEnjinia1701/potpress			
PotPress upright pair (make 2): making sketch							
DRAWING NO. PPR-DWG-103			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 		DATE 2026-09-30		DRAWN Amish Chadha	
MATERIAL / NOTES Two UPN 100 channels 1,401 mm; 25 x 3 tube; 2 mm sheet; S275							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com							
Generated from cad/src; do not edit by hand							