



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

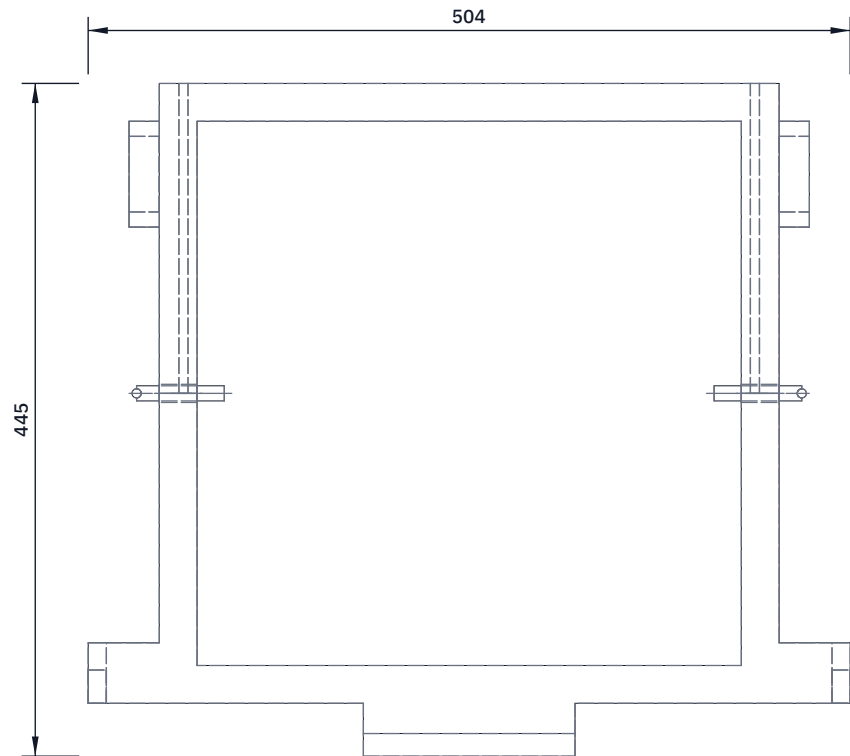


TOP VIEW

Scale 1:5; looking down (along -Z)

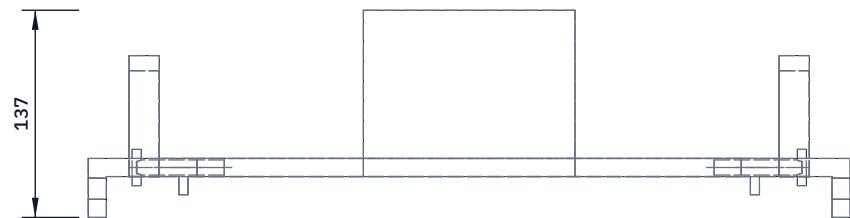


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

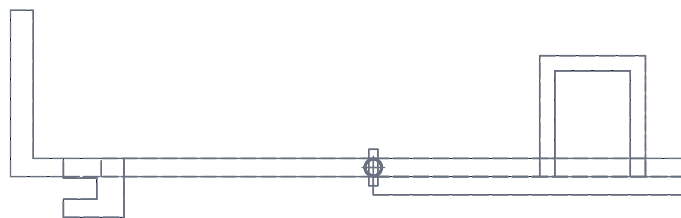

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

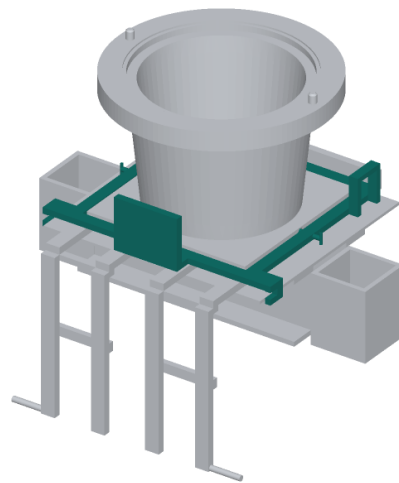

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Ring: 25 x 12 mm flat bar, 410 mm square outside, 360 mm inside; it lies flat on the rails round the female mold's base plate.

Pull handle: 140 x 35 x 12 mm tab at the front, with a 140 x 15 mm upright 98 mm tall.

Side lips: 6 x 12 mm bar under the ring, 186 to 192 mm out, along the back half; they run 1 mm outside the outer rails.

Tipping hooks: a 12 mm arm from the ring out to 252 mm each side, 190 mm in front of the middle, and a 40 x 27 x 12 mm plate hanging down with a 14 mm tall slot, 23 mm deep, open to the front.

Lift handles: 20 x 10 mm bar bent to a loop 70 mm tall, on the ring's outer edge 110 to 180 mm behind the middle.

Retaining pins: 12 mm hole across each side at the middle; a 10 mm pin with a T handle goes through into the base plate edge.

Check: slides the full rail length without catching at the hinge.

POTPRESS

github.com/BoujeeEnjinia1701/potpress

PotPress mold carriage: making sketch

DRAWING NO. PPR-DWG-106		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
MATERIAL / NOTES 25 x 12 and 20 x 10 flat bar, 12 mm plate, 10 mm round bar; S275				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	