
BUILD PLAN SKETCH, PLAN NOT YET BUILT


PotPress · github.com/BoujeeEnjinia1701/potpress

REV	DESCRIPTION	DATE	BY
P1	First issue	2026-09-30	AC
P2	Clay shrink allowance; 480 flange; eye bolts; melt check	2026-10-23	AC

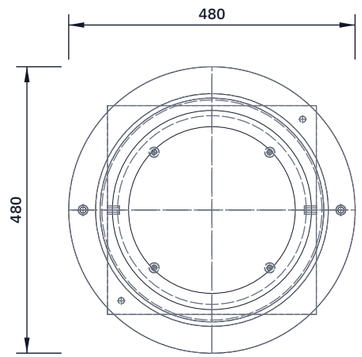


TOP VIEW

Scale 1:10; looking down (along -Z)

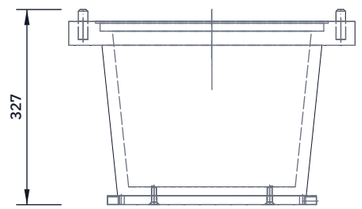


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

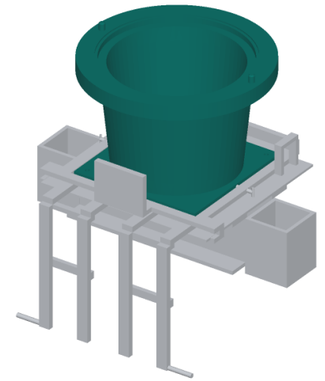

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cast cup: flange 480 mm dia x 40, cavity the pressed pot's outside (279 at the floor, 337 at the rim, 277 deep: fired size / 0.92 for 8 % clay shrink), 20 shell, 16.3 floor, rim 375 x 16.3, flash to 390.
Pattern: printed in PLA, flat-back, flange face down on the board; the cavity forms its own sand core. Add 1.3 % shrink, 3 mm to lap off the flange face and the base, 2 degree draft on the rim.
Finish: lap the flange face (stop ring 390 to 480) flat on abrasive paper on float glass; finish the cavity to printed templates.
Base plate: 350 x 350 x 15 mm, four 9 mm countersunk holes on the diagonals, 137 mm from the middle; 14 mm holes 20 deep in two edges. Bed the cup on steel epoxy putty and hold it with 4 x M8 screws.
Dowels: 16 mm hardened, 50 long, pressed 30 deep at 216 mm each side; drilled with the male mold clamped on (see the joint picture).
Eye bolts: 2 x M12 tapped through the base plate on a diagonal, 215 mm.
Check: templates within 0.3 mm; foundry melt check (XRF or OES).

POTPRESS

github.com/BoujeeEnjinia1701/potpress

PotPress female mold: making sketch

DRAWING NO.	REV	SHEET	SIZE
PPR-DWG-107	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:10	mm		2026-10-23	Amish Chadha

MATERIAL / NOTES

Sand-cast aluminium (lead-free scrap); 15 mm S275 plate; 16 mm dowels

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand