



REV	DESCRIPTION	DATE	BY
P1	First issue	2026-09-30	AC
P2	Pump slot lengthened; fixed inner shield added	2026-10-02	AC




TOP VIEW

Scale 1:20; looking down (along -Z)

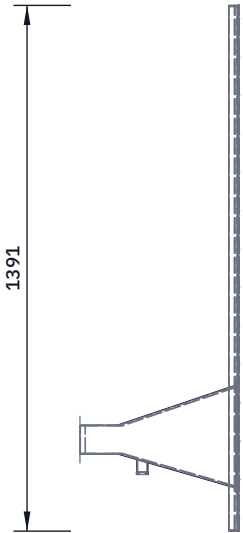


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

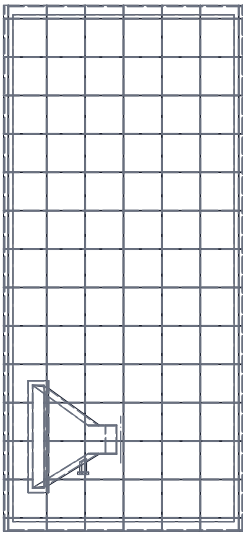

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

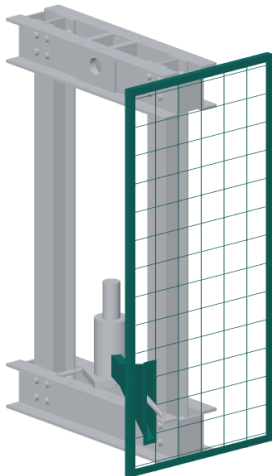

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Seven panels, each mesh on a welded frame of 25 x 25 x 3 angle: sides 635 (right) and 675 (left) x 1,391 mm; rear 940 x 1,391; front strips 180 x 1,391; lower front 580 x 320; roof 940 x 675 with a cut-out round the top beam. Mesh drawn at every 8th wire. Pump slot (right side): 30 x 272 mm, 174 to 446 mm up, centred 218 mm in front of the middle; frame it with 3 mm strip. No brush strip. Shield behind the slot: 2 mm sheet folded into a tunnel 30 mm wide inside, along the pump handle's line to 3 mm off the jack body; roof and floor 25 mm clear of the handle at both ends of its stroke. A 3 mm flange bolts through the slot frame (4 x M8); a 30 x 6 mm stay bolts to the base beam. The handle goes in through slot and tunnel. Interlock holes (front right strip): 44 mm square at the release shaft and a 40 mm square for the pin cable. Fixing mesh: clamp it under bolted flat strips, or grind the zinc off before welding (fume: see safety stops). Standoffs: eight 40 x 6 mm flat bars bolted to the beam webs; the side panels bolt to them. Panels bolt to each other with M8. Right front strip sits 40 mm back to leave a pocket for the interlock. Check: flat within 3 mm; no panel over about 10 kg.

POTPRESS

github.com/BoujeeEnjinia1701/potpress

PotPress fixed mesh guards (right side guard drawn): making sketch

DRAWING NO. PPR-DWG-110			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Galvanised welded mesh 12.7 x 12.7 x 1.6 mm; 25 x 25 x 3 angle; 2 mm steel sheet (shield)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand