


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

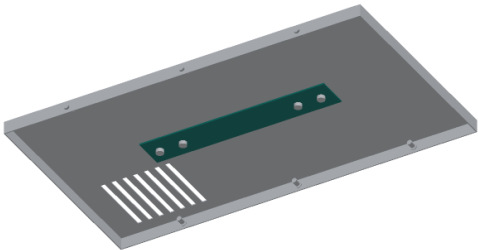

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS


Cut 240 x 40 mm from 2 mm sheet; round the corners and deburr.

Four 5.5 mm holes on the centre line, 15, 45, 195 and 225 from the left end. Drill it clamped under the lid so the holes match.

Fit: under the lid, centred, held by the four M5 handle bolts; the nyloc nuts sit on the doubler.

It spreads the carrying load of about 9.4 kg over the thin lid.

Check: the bolts pass through handle, lid and doubler without forcing.

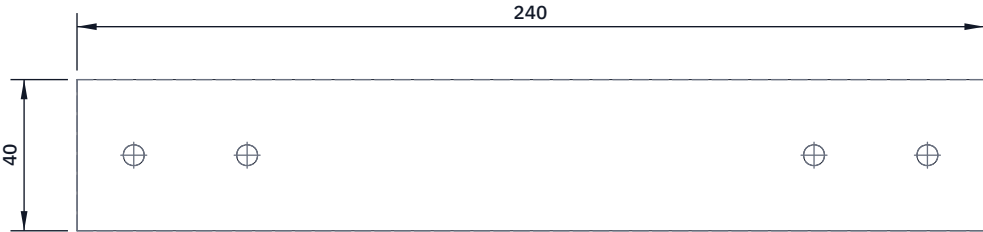

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

POWERBOX				github.com/BoujeeEnjinia1701/powerbox			
PowerBox handle doubler plate: making sketch							
DRAWING NO. PBX-DWG-103			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES 5052 aluminium sheet 2 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	