



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

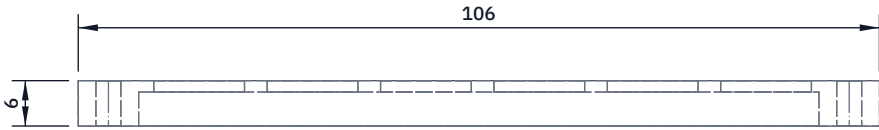

TOP VIEW

Scale 1:1; looking down (along -Z)

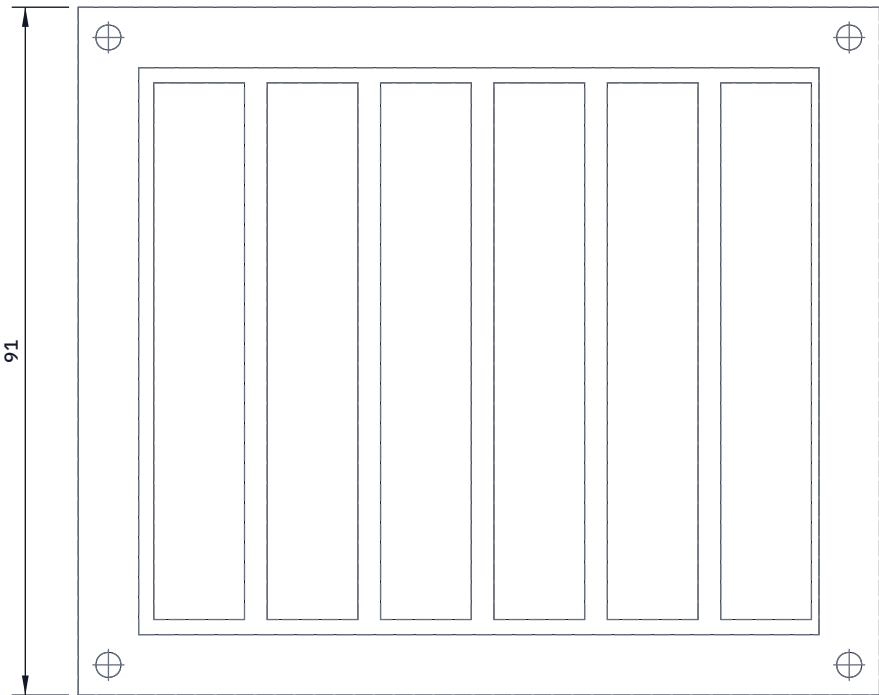


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

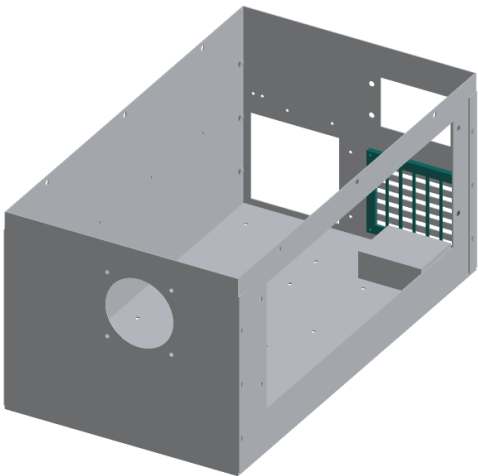

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A frame 106 wide x 91 tall x 6 thick, printed lying flat.
Window 90 x 75, the same as the slotted area of the end wall.
A 4.5 mm deep pocket on the wall side holds a 5 mm foam filter pad;
a 1.5 mm grid of six bars keeps the pad in.
Four 3.3 mm holes, 4 in from each side and 4 from top and bottom.
Fit: inside the door end wall over the intake slots, its window
20 to 110 from the front edge and 20 to 95 up; four M3 screws from
outside with nuts inside.
Check: the pad covers every slot and lifts out for washing.

POWERBOX

github.com/BoujeeEnjinia1701/powerbox

PowerBox intake filter frame: making sketch

DRAWING NO. PBX-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 4 walls, 40 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	