


| REV | DESCRIPTION                                | DATE       | BY |
|-----|--------------------------------------------|------------|----|
| P1  | Making sketch for the prototype build plan | 2026-10-01 | AC |




TOP VIEW  
Scale 1:5; looking down (along -Z)

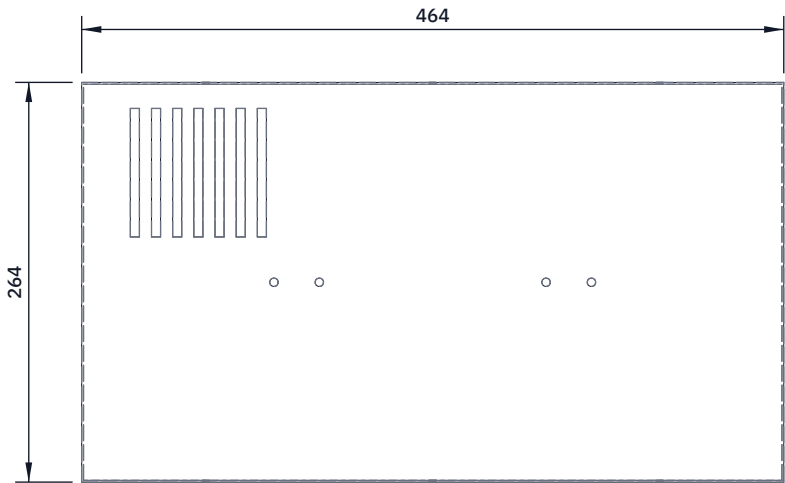

FRONT VIEW  
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW  
Scale 1:5; looking at the right side (along -X)

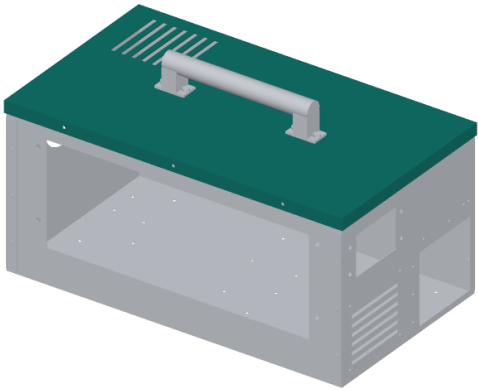

WHERE IT GOES  
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank: top 464.4 x 264.4 mm with a 16 mm skirt folded down on all sides; relieve the corners, they need not be closed.

Seven exhaust slots 6 x 85 mm, 14 mm apart, the first 32.2 from the left edge, from 162.2 to 247.2 back from the front edge.

Handle bolt holes 5.5 mm on the centre line, 127.2, 157.2, 307.2 and 337.2 from the left edge.

Screw holes 4.5 mm in the front and back skirts, 82.2, 232.2 and 382.2 from the left edge, 7.8 above the skirt's lower edge.

Fit: the top rests on the wall tops; the skirt hangs outside the walls with a 1 mm gap, where the rivet nut flanges sit.

Six M4 pan-head screws through the skirt into the rivet nuts.

Check: the lid drops on without forcing and every hole lines up.

|                                                                    |             |                                                                                                     |           |                                       |                 |                                             |                |
|--------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------|-----------|---------------------------------------|-----------------|---------------------------------------------|----------------|
| POWERBOX                                                           |             |                                                                                                     |           | github.com/BoujeeEnjinia1701/powerbox |                 |                                             |                |
| PowerBox lid: making sketch                                        |             |                                                                                                     |           |                                       |                 |                                             |                |
| DRAWING NO.<br>PBX-DWG-102                                         |             |                                                                                                     | REV<br>P1 |                                       | SHEET<br>1 of 1 |                                             | SIZE<br>ANSI B |
| SCALE<br>1:5                                                       | UNITS<br>mm | PROJECTION<br> |           | DATE<br>2026-10-01                    |                 | DRAWN<br>Amish Chadha                       |                |
| MATERIAL / NOTES<br>5052 aluminium sheet 1.2 mm, folded            |             |                                                                                                     |           |                                       |                 |                                             |                |
| Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com |             |                                                                                                     |           |                                       |                 | Generated from cad/src; do not edit by hand |                |