



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

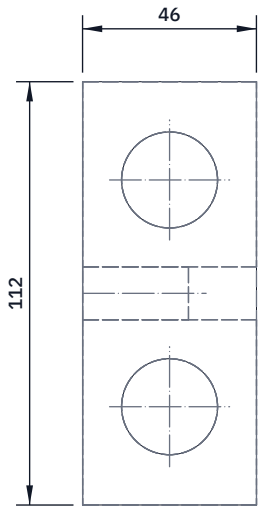


TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)

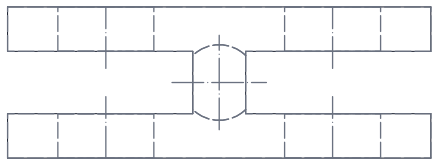

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

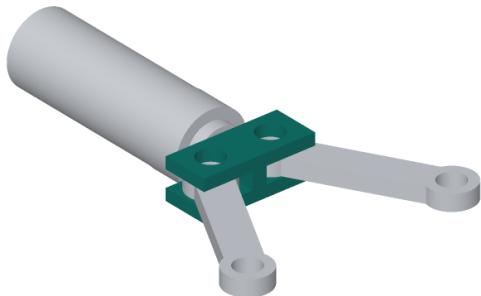

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Block 46 long (along the cylinder) x 112 wide x 40 tall.
Two slots 16.5 wide, centred in the height, from 7 mm either side of the centre line out to each side face: the links go in these. Mill or saw and file; keep the slot sides square.
Pin bores 25.4 mm through the top and bottom, 30 mm each side of the centre line, at the middle of the length.
Back face: tap M24 to suit the plunger stud (drill 21 mm, 25 mm deep) on the centre; the back face sits on the plunger end.
Check: a link slides into each slot with 0.5 mm play in all.

RUBBLEJACK

github.com/BoujeeEnjinia1701/rubblejack

RubbleJack crosshead: making sketch

DRAWING NO. RBJ-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 7075-T6 aluminium plate, 100 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand