



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

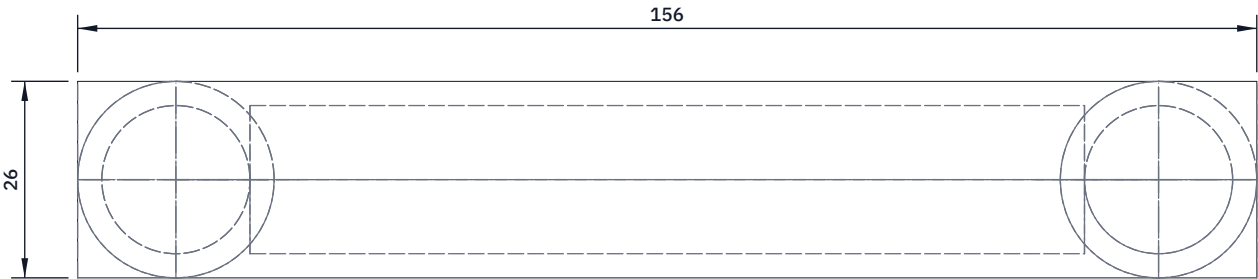

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

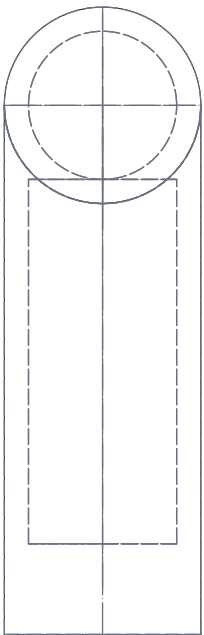

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

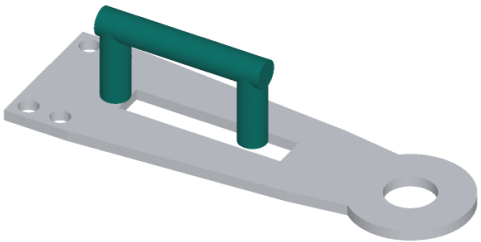

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bend one tube to a D: two posts 70 mm tall and a grip bar.
Spreader handle: posts 130 mm apart (drawn). Cutter: 110 mm apart.
Weld an M12 threaded plug into each post foot, faced flat.
Fit: M12 cap screw up through the plate's 13.6 mm hole into each plug, with a spring washer under the head.
Check: lift the finished tool by it; no movement at the feet.

RUBBLEJACK			github.com/BoujeeEnjinia1701/rubblejack		
RubbleJack carry handle (make 2): making sketch					
DRAWING NO. RBJ-DWG-110			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Steel tube 26.9 x 3.2 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		