



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

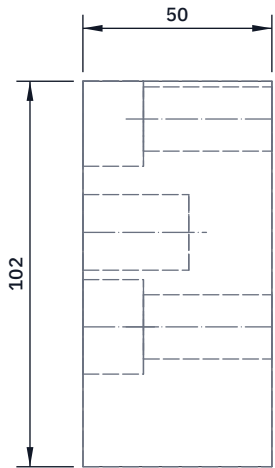


TOP VIEW

Scale 1:2; looking down (along -Z)

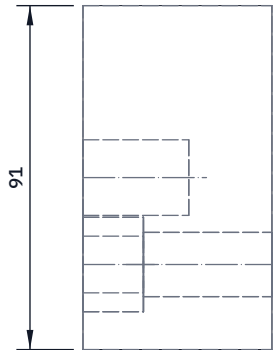


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

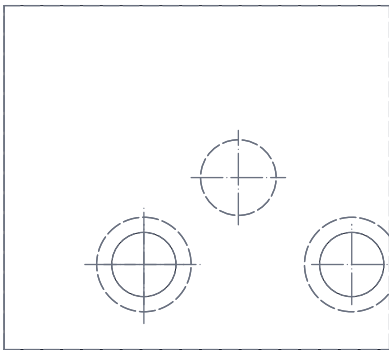

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

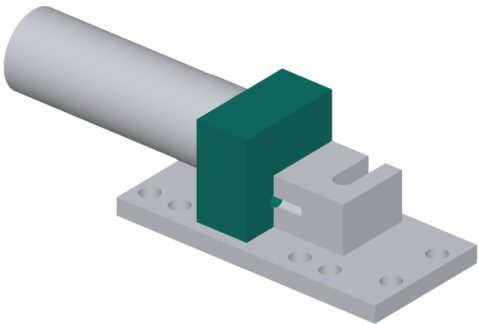

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Block 50 long x 102 wide x 91 tall; it slides between the plates.

Back face: tap M24 for the plunger stud (drill 21, 25 deep), on the cylinder axis, 62 mm from the lower long edge.

Two 17 mm holes through, front to back, for the blade screws:

23 mm below the middle of the height, at 25 mm and 30 mm either side of the axis; counterbore 25 mm, 16 deep, at the back.

Check: slides between two 92 mm spaced plates with 0.5 to 1 mm play.

RUBBLEJACK

github.com/BoujeeEnjinia1701/rubblejack

RubbleJack blade carrier: making sketch

DRAWING NO. RBJ-DWG-111			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 7075-T6 aluminium plate, 100 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	