


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

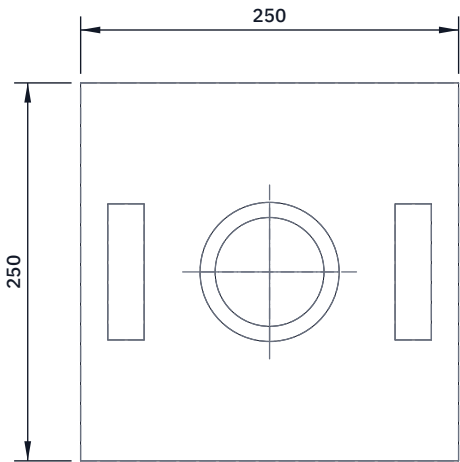


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

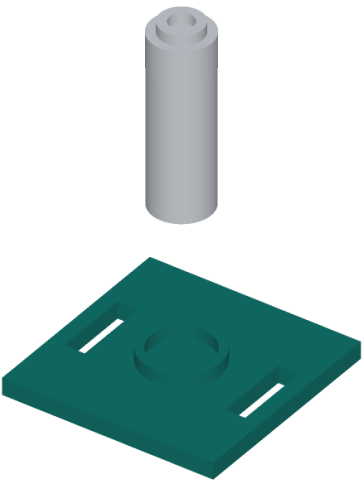

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Plate 250 x 250 x 20, high-strength steel (do not swap to mild steel).
Two hand slots 24 x 90, centred 30 mm in from two opposite edges.
Ring 92 outside, 72 inside, 15 tall, on the centre.
Weld the ring with a 6 mm fillet all round, low-hydrogen rods,
preheat as the plate maker's sheet says; let it cool slowly.
Check: plate flat to 1 mm after welding; cylinder base drops in.

RUBBLEJACK

github.com/BoujeeEnjinia1701/rubblejack

RubbleJack ram base plate: making sketch

DRAWING NO. RBJ-DWG-117			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES S690QL steel plate, 20 mm; S355 ring					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand