

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

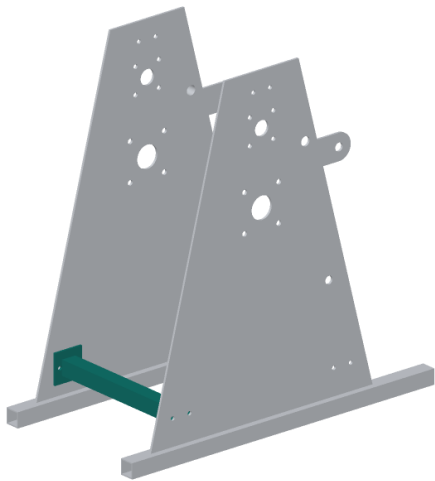

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make 6: three per capstan, all the same.

Tube: SHS 40 x 40 x 3 mm, 382 mm long, ends square.

End plates: 80 x 80 x 6 mm, two per tube, welded on centre so the length over both plates is 394 mm (the gap between cheeks).

Two 11 mm holes in each plate, 25 mm each side of the tube centre, on the horizontal centre line.

Weld all round; grind the weld flush on the outer faces.

Galvanise; run a drill through the holes after galvanising.

Fit: plates sit flat on the inner faces of the cheeks, two M10 bolts each end. Positions: front low (240 ahead, 110 up), rear low (240 behind, 110 up) and top (over the drum, 850 up).

Check: 394 mm over the plates, within 1 mm, plates parallel.

SALTDRAW

github.com/BoujeeEnjinia1701/saltdrag

SaltDrag capstan cross tube (make 6): making sketch

DRAWING NO. SDG-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES SHS 40 x 40 x 3 mm and plate 6 mm, S275; hot-dip galvanised					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	