REV	DESCRIPTION	DATE	BY
P1	First making sketch (SDG-DDR-002)	2026-10-03	AC
P2	SDG-DEC-001 D17 to D24: STEM check fixes, kit 1.9.1	2026-10-24	AC

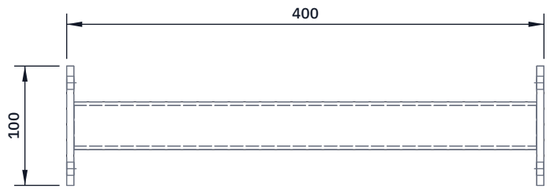

TOP VIEW

Scale 1:5; looking down (along -Z)

FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

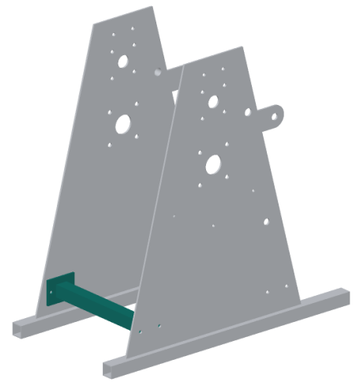

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make 6: three per capstan, all the same.
Tube: SHS 40 x 40 x 3 mm, 388 mm long, ends square.
End plates: 100 x 80 x 6 mm, two per tube, welded on centre so
the length over both plates is 400 mm (the gap between cheeks).
Two 11 mm holes in each plate, 36 mm each side of the tube centre,
on the long centre line, so the washers clear the welds.
Weld all round, 5 mm fillet; keep the outer faces flat.
Galvanise; run a drill through the holes after galvanising.
Fit: plates sit flat on the inner faces of the cheeks, two
M10 bolts each end. Positions: front low (240 ahead, 110 up),
rear low (240 behind, 110 up) and top (over the drum, 850 up).
Check: 400 mm over the plates, within 1 mm, plates parallel.

SALTDRAG github.com/BoujeeEnjinia1701/saltdrag

SaltDrag capstan cross tube (make 6): making sketch

DRAWING NO.	REV	SHEET	SIZE
SDG-DWG-102	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES
SHS 40 x 40 x 3 mm and plate 6 mm, S275; hot-dip galvanised

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com
Generated from cad/src; do not edit by hand