




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

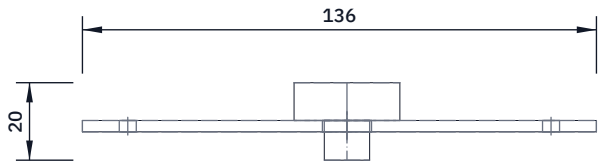


TOP VIEW
Scale 1:2; looking down (along -Z)

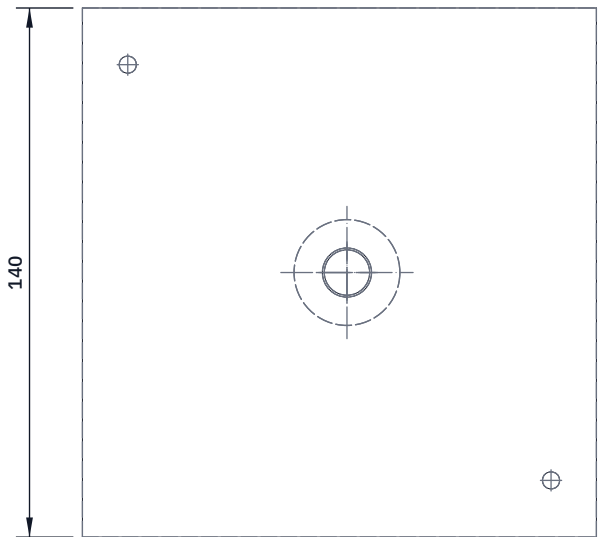

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

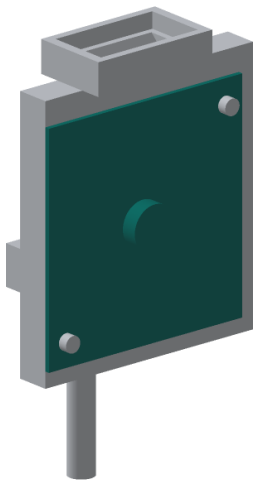

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Door: cut 136 x 140 mm from 3 mm clear polycarbonate (score and snap, or a fine saw); round the corners 5 mm; keep the film on to drill.
13 mm hole for the knob stem, 70 mm from the rear edge, 70 mm up.
4.5 mm holes for the thumb screws: 12 from the rear edge 125 up, and 124 from the rear edge 15 up.
Knob: print a 28 mm head, 10 thick, on a 12 mm stem 10.5 long; press an M6 x 25 screw through its centre as a stud (head moulded in).
Fit: the door covers the opening on the housing's door side with two M4 thumb screws; the knob stem passes the door and screws into the shaft end, clamping the plate against the shaft collar.
Check: door off and knob out in under a minute, no tools.

SEEDLINE

github.com/BoujeeEnjinia1701/seedline

SeedLine housing door and plate knob: making sketch

DRAWING NO. SDL - DWG - 113		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES Clear polycarbonate sheet 3 mm; knob PETG printed				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	