
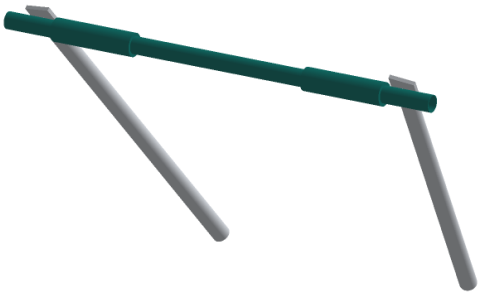


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

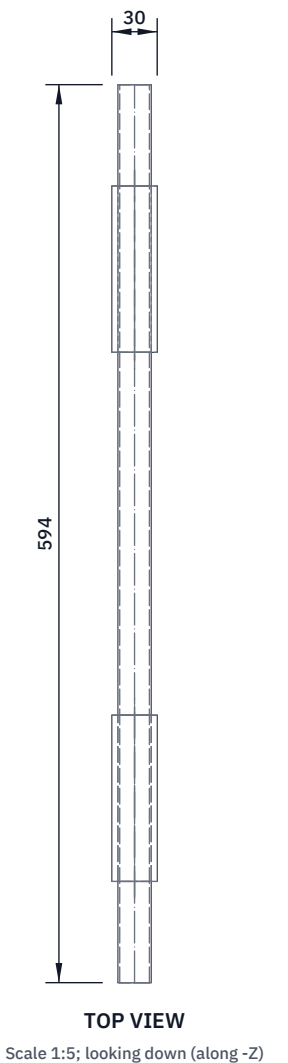

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Cut 594 mm of 22 x 1.2 tube; deburr; fit end plugs.
- Two 6.5 mm holes square through the tube, 45 mm from each end, both in the same plane.
- Push a 110 mm rubber grip on from each end to 22 mm inside each hole (soapy water helps); the hands hold just inside the side tubes.
- Fit: across the back of the flattened tops of the upper tubes, one M6 bolt each through the flat and the grip.
- Check: grip level when the seeder stands on both wheels.

SEEDLINE			github.com/BoujeeEnjinia1701/seedline		
SeedLine cross grip: making sketch					
DRAWING NO. SDL - DWG - 121			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel round tube 22 x 1.2 mm; rubber grips					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	