



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	SDL-DEC-001: 13 mm slot, plate liners, UV-stabilized door	2026-10-02	AC




TOP VIEW

Scale 1:5; looking down (along -Z)

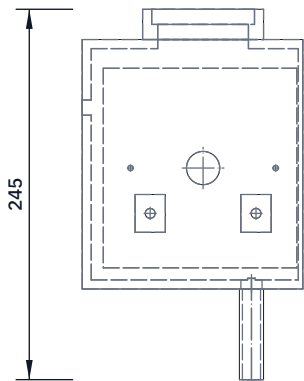


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

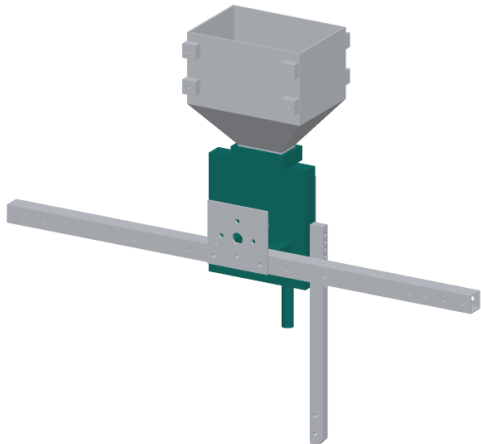

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Body 146 long x 25 wide x 165 tall; a 13 mm slot inside holds a 6, 8 or 10 mm plate with its liners; front wall 3 mm, others 6 mm.

On top: a collar 80 x 48 x 20 with a 68 x 38 pocket, 10 deep, and a funnel from 60 x 30 down to the 60 x 13 slot. The hopper neck drops in.

Chain side: a 22 mm hole for the plate hub; two lugs 20 x 37 x 25 with 6.5 mm holes and an M6 nut slot, 35 mm each side of the shaft.

Door side: an opening 128 x 132; two M4 heat-set inserts for the door.

Rear wall: a 13 x 10 slot 35 to 45 mm above the shaft for the brush.

Chain-side slot wall: two 3.4 mm peg holes, 5 deep, 48 mm each side of the shaft.

Under the outlet: a spigot 16 mm outside, 12 mm bore, 60 long.

Print standing on its bottom face; support the lugs and collar.

Fit: lugs on the chain-side rail's inside face, on the bearing plate bolts; the plate turns in the slot without touching.

Check: a 6 mm plate with both liners turns in the slot, door on.

SEEDLINE

github.com/BoujeeEnjinia1701/seedline

SeedLine metering housing: making sketch

DRAWING NO. SDL - DWG - 112			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 4 walls, 40 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand